



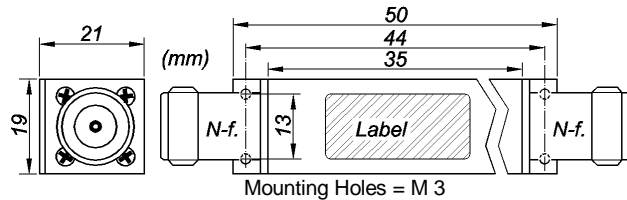

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

F_{co} between 150 and 699 MHz	<h2 style="margin: 0;">Highpass Stock* Filters</h2> <p style="margin: 0;">Chebyshev Design 2 Sections</p>	WHJS Series: 21 mm high
--	---	-----------------------------------

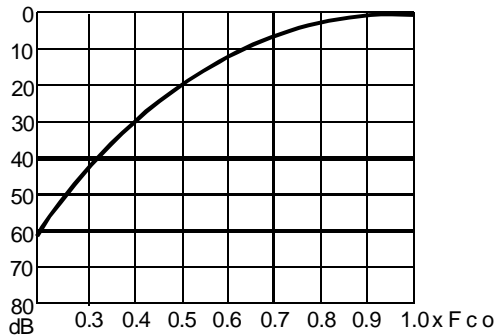

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)

Return Loss (50 Ω) in Passband:
 near F_{co}: 20 dB typical = VSWR 1.23 : 1 max.
 at the worst point: 14 dB min. = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at F _{co}	at 1.03 x F _{co}	at 1.1 x F _{co}	40 dB min. at 0.33 x F _{co} =	60 dB min. from DC to 0.21 x F _{co} =
WHJS 150-2**	150 to 2000	0.22 dB	0.21 dB	0.20 dB	49.5 MHz	DC to 31.5 MHz
WHJS 160-2**	160 to 2000	0.22 dB	0.21 dB	0.20 dB	52.8 MHz	DC to 33.6 MHz
WHJS 170-2**	170 to 2000	0.22 dB	0.21 dB	0.20 dB	56.1 MHz	DC to 35.7 MHz
WHJS 185-2**	185 to 2000	0.21 dB	0.20 dB	0.19 dB	61.1 MHz	DC to 38.9 MHz
WHJS 200-2**	200 to 2000	0.21 dB	0.20 dB	0.19 dB	66.0 MHz	DC to 42.0 MHz
WHJS 215-2**	215 to 2000	0.21 dB	0.20 dB	0.19 dB	71.0 MHz	DC to 45.2 MHz
WHJS 230-2**	230 to 2000	0.21 dB	0.20 dB	0.19 dB	75.9 MHz	DC to 48.3 MHz
WHJS 245-2**	245 to 2000	0.21 dB	0.20 dB	0.19 dB	80.9 MHz	DC to 51.5 MHz
WHJS 260-2**	260 to 3000	0.21 dB	0.20 dB	0.19 dB	85.8 MHz	DC to 54.6 MHz
WHJS 275-2**	275 to 3000	0.21 dB	0.20 dB	0.19 dB	90.8 MHz	DC to 57.8 MHz
WHJS 300-2**	300 to 3000	0.21 dB	0.20 dB	0.19 dB	99.0 MHz	DC to 63.0 MHz
WHJS 325-2**	325 to 3000	0.21 dB	0.20 dB	0.19 dB	107.0 MHz	DC to 68.3 MHz
WHJS 350-2**	350 to 3000	0.21 dB	0.20 dB	0.19 dB	116.0 MHz	DC to 73.5 MHz
WHJS 375-2**	375 to 3000	0.21 dB	0.20 dB	0.19 dB	124.0 MHz	DC to 78.8 MHz
WHJS 400-2**	400 to 3000	0.21 dB	0.20 dB	0.19 dB	132.0 MHz	DC to 84.0 MHz
WHJS 425-2**	425 to 3000	0.21 dB	0.20 dB	0.19 dB	140.0 MHz	DC to 89.3 MHz
WHJS 450-2**	450 to 3000	0.21 dB	0.20 dB	0.19 dB	149.0 MHz	DC to 94.5 MHz
WHJS 500-2**	500 to 3000	0.24 dB	0.23 dB	0.22 dB	165.0 MHz	DC to 105.0 MHz
WHJS 550-2**	550 to 3000	0.24 dB	0.23 dB	0.22 dB	182.0 MHz	DC to 116.0 MHz
WHJS 600-2**	600 to 4000	0.24 dB	0.23 dB	0.22 dB	198.0 MHz	DC to 126.0 MHz
WHJS 650-2**	650 to 4000	0.24 dB	0.23 dB	0.22 dB	215.0 MHz	DC to 137.0 MHz

Filters with cut-off frequencies that are not listed above:

Choose any F_{co} between 150 and 699 MHz and assign a **Model Number** by inserting the desired F_{co}.

Example = WHJS 625-2.** The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHJS 625-2** see filter WHJS 600-2**.

PRICES (each)	EURO ¹⁾	US-\$ ²⁾
1 to 4 filters	230	430
5 to 9 filters	207	297
10 to 24 filters	187	255
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

- 1) **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.
- 2) **US-\$-Prices** include packaging, shipping by UPS, import charges, and customs duty. Dollar prices for shipments to the USA only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

STOCK* FILTERS carry an „S“ in the model number (i.e. WHJS 375-2**). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.

For more details see terms & ordering information.

Delivery time if not in stock: normally 3 to 4 weeks
 - depending on work load in factory at time of order.