



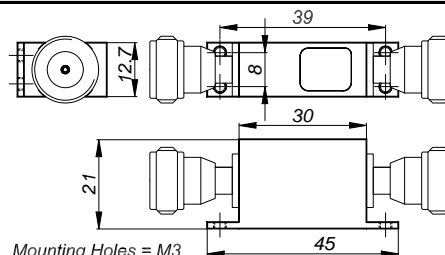

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 700 and 3000 MHz	Highpass Standard* Filters Chebyshev Design 2 Sections	WHJS Series: 21 mm high
---	---	------------------------------------

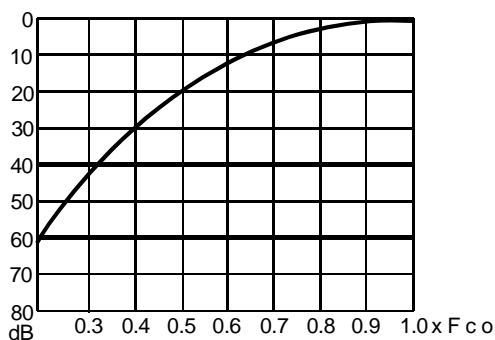

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)
Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Filters with **cut-off frequencies that are not listed above:**

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.33 x Fco	60 dB min. from DC to 0.21 x Fco
WHJS 700-2**	700 to 7000	0.20 dB	0.19 dB	0.18 dB	231 MHz	DC to 147 MHz
WHJS 750-2**	750 to 7000	0.20 dB	0.19 dB	0.18 dB	248 MHz	DC to 158 MHz
WHJS 800-2**	800 to 7000	0.20 dB	0.19 dB	0.18 dB	264 MHz	DC to 168 MHz
WHJS 900-2**	900 to 7000	0.20 dB	0.19 dB	0.18 dB	297 MHz	DC to 189 MHz
WHJS 1000-2**	1000 to 8000	0.20 dB	0.19 dB	0.18 dB	330 MHz	DC to 210 MHz
WHJS 1100-2**	1100 to 8000	0.20 dB	0.19 dB	0.18 dB	363 MHz	DC to 231 MHz
WHJS 1200-2**	1200 to 8000	0.20 dB	0.19 dB	0.18 dB	396 MHz	DC to 252 MHz
WHJS 1300-2**	1300 to 8000	0.20 dB	0.19 dB	0.18 dB	429 MHz	DC to 273 MHz
WHJS 1400-2**	1400 to 8000	0.20 dB	0.19 dB	0.18 dB	462 MHz	DC to 294 MHz
WHJS 1500-2**	1500 to 8000	0.20 dB	0.19 dB	0.18 dB	495 MHz	DC to 315 MHz
WHJS 1600-2**	1600 to 8000	0.20 dB	0.19 dB	0.18 dB	528 MHz	DC to 336 MHz
WHJS 1700-2**	1700 to 8000	0.20 dB	0.19 dB	0.18 dB	561 MHz	DC to 357 MHz
WHJS 1800-2**	1800 to 8000	0.20 dB	0.19 dB	0.18 dB	594 MHz	DC to 378 MHz
WHJS 2000-2**	2000 to 8000	0.20 dB	0.19 dB	0.18 dB	660 MHz	DC to 420 MHz
WHJS 2250-2**	2250 to 8000	0.20 dB	0.19 dB	0.18 dB	743 MHz	DC to 473 MHz
WHJS 2500-2**	2500 to 8000	0.20 dB	0.19 dB	0.18 dB	825 MHz	DC to 525 MHz
WHJS 2750-2**	2750 to 8000	0.20 dB	0.19 dB	0.18 dB	908 MHz	DC to 578 MHz
WHJS 3000-2**	3000 to 8000	0.20 dB	0.19 dB	0.18 dB	990 MHz	DC to 630 MHz

Choose any Fco between 700 and 3000 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHJS 950-2.** The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHJS 950-2** - see filter WHJS 900-2**.

PRICES (each)	EURO	US-\$
1 to 4 filters	230	Will be quoted
5 to 9 filters	207	
10 to 24 filters	187	
Test Report with Analyzer Curves:	15	
Cert. of Conformance:	supplied	

Delivery Terms: FCA Andechs-Frieding (free carrier) according to **Incoterms 2000**

Regarding payment terms and Warranty see [Terms and Conditions](#)

In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2000** (unversichert).

Delivery Time: normally 3 to 4 weeks - depending on quantity ordered and on our work load at time of order.

*) **Standard Filters carry an „S“ in the model number** (i.e. WHJS 375-2**). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.