



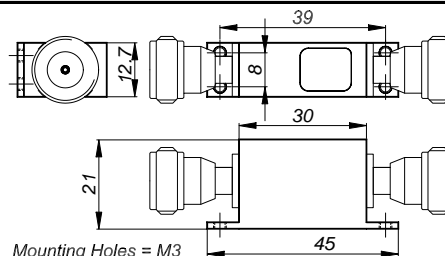

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 700 and 3000 MHz	Highpass Stock* Filters Chebyshev Design 3 Sections	WHJS Series: 21 mm high
---	--	--

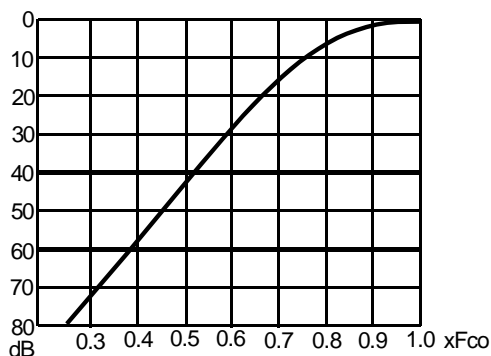

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)
Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.52 x Fco =	60 dB min. from DC to 0.39 x Fco =
WHJS 700-3**	700 to 7000	0.30 dB	0.29 dB	0.28 dB	364.0 MHz	DC to 273 MHz
WHJS 750-3**	750 to 7000	0.30 dB	0.29 dB	0.28 dB	390.0 MHz	DC to 293 MHz
WHJS 800-3**	800 to 7000	0.30 dB	0.29 dB	0.28 dB	416.0 MHz	DC to 312 MHz
WHJS 900-3**	900 to 7000	0.30 dB	0.29 dB	0.28 dB	468.0 MHz	DC to 351 MHz
WHJS 1000-3**	1000 to 8000	0.30 dB	0.29 dB	0.28 dB	520.0 MHz	DC to 390 MHz
WHJS 1100-3**	1100 to 8000	0.30 dB	0.29 dB	0.28 dB	572.0 MHz	DC to 429 MHz
WHJS 1200-3**	1200 to 8000	0.30 dB	0.29 dB	0.28 dB	624.0 MHz	DC to 468 MHz
WHJS 1300-3**	1300 to 8000	0.30 dB	0.29 dB	0.28 dB	676.0 MHz	DC to 507 MHz
WHJS 1400-3**	1400 to 8000	0.30 dB	0.29 dB	0.28 dB	728.0 MHz	DC to 546 MHz
WHJS 1500-3**	1500 to 8000	0.30 dB	0.29 dB	0.28 dB	780.0 MHz	DC to 585 MHz
WHJS 1600-3**	1600 to 8000	0.30 dB	0.29 dB	0.28 dB	832.0 MHz	DC to 624 MHz
WHJS 1700-3**	1700 to 8000	0.30 dB	0.29 dB	0.28 dB	884.0 MHz	DC to 663 MHz
WHJS 1800-3**	1800 to 8000	0.30 dB	0.29 dB	0.28 dB	936.0 MHz	DC to 702 MHz
WHJS 2000-3**	2000 to 8000	0.30 dB	0.29 dB	0.28 dB	1040.0 MHz	DC to 780 MHz
WHJS 2250-3**	2250 to 8000	0.30 dB	0.29 dB	0.28 dB	1170.0 MHz	DC to 878 MHz
WHJS 2500-3**	2500 to 8000	0.30 dB	0.29 dB	0.28 dB	1300.0 MHz	DC to 975 MHz
WHJS 2750-3**	2750 to 8000	0.30 dB	0.29 dB	0.28 dB	1430.0 MHz	DC to 1070 MHz
WHJS 3000-3**	3000 to 8000	0.30 dB	0.29 dB	0.28 dB	1560.0 MHz	DC to 1170 MHz

Filters with cut-off frequencies that are not listed above:

Choose any Fco between 700 and 3000 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHJS 950-3.** The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHJS 950-3** see filter WHJS 900-3**.

	EURO 1)	US-\$
1 to 4 filters	255	<i>Will be quoted.</i>
5 to 9 filters	230	
10 to 24 filters	207	
Test Data Sheets:	10	
Netw. Analyzer Curves:	15	
Cert. of Conformance:	supplied	

1) **Delivery Terms:** FCA Andechs-Frieding (free carrier) according to **Incoterms 2000**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2000** (unversichert).

Regarding payment terms and Warranty see [Terms and Conditions](#)

Delivery Time: normally 3 to 4 weeks - depending on quantity ordered and on our work load at time of order.