



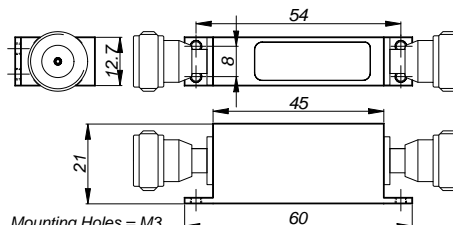

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 700 and 3000 MHz	Highpass Stock* Filters Chebyshev Design 5 Sections	WHJS Series: 21 mm high
---	--	--

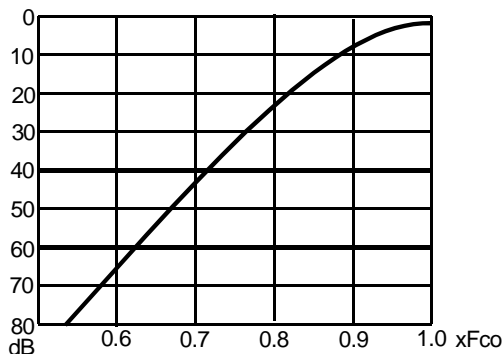

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)
Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.735 x Fco =	60 dB min. from DC to 0.63 x Fco =
WHJS 700-5**	700 to 7000	0.60 dB	0.50 dB	0.40 dB	515.0 MHz	DC to 441 MHz
WHJS 750-5**	750 to 7000	0.60 dB	0.50 dB	0.40 dB	551.0 MHz	DC to 473 MHz
WHJS 800-5**	800 to 7000	0.60 dB	0.50 dB	0.40 dB	588.0 MHz	DC to 504 MHz
WHJS 900-5**	900 to 7000	0.60 dB	0.50 dB	0.40 dB	662.0 MHz	DC to 567 MHz
WHJS 1000-5**	1000 to 8000	0.60 dB	0.50 dB	0.40 dB	735.0 MHz	DC to 630 MHz
WHJS 1100-5**	1100 to 8000	0.60 dB	0.50 dB	0.40 dB	809.0 MHz	DC to 693 MHz
WHJS 1200-5**	1200 to 8000	0.60 dB	0.50 dB	0.40 dB	882.0 MHz	DC to 756 MHz
WHJS 1300-5**	1300 to 8000	0.60 dB	0.50 dB	0.40 dB	956.0 MHz	DC to 819 MHz
WHJS 1400-5**	1400 to 8000	0.60 dB	0.50 dB	0.40 dB	1030.0 MHz	DC to 882 MHz
WHJS 1500-5**	1500 to 8000	0.60 dB	0.50 dB	0.40 dB	1100.0 MHz	DC to 945 MHz
WHJS 1600-5**	1600 to 8000	0.60 dB	0.50 dB	0.40 dB	1170.0 MHz	DC to 1000 MHz
WHJS 1700-5**	1700 to 8000	0.60 dB	0.50 dB	0.40 dB	1250.0 MHz	DC to 1070 MHz
WHJS 1800-5**	1800 to 8000	0.60 dB	0.50 dB	0.40 dB	1320.0 MHz	DC to 1130 MHz
WHJS 2000-5**	2000 to 8000	0.60 dB	0.50 dB	0.40 dB	1470.0 MHz	DC to 1260 MHz
WHJS 2250-5**	2250 to 8000	0.60 dB	0.50 dB	0.40 dB	1650.0 MHz	DC to 1410 MHz
WHJS 2500-5**	2500 to 8000	0.60 dB	0.50 dB	0.40 dB	1840.0 MHz	DC to 1580 MHz
WHJS 2750-5**	2750 to 8000	0.60 dB	0.50 dB	0.40 dB	2020.0 MHz	DC to 1730 MHz
WHJS 3000-5**	3000 to 8000	0.60 dB	0.50 dB	0.40 dB	2200.0 MHz	DC to 1890 MHz

Filters with **cut-off frequencies that are not listed above:**

Choose any Fco between 700 and 3000 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHJS 950-5.** The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHJS 950-5** see filter WHJS 900-5**.

	EURO ¹⁾	US-\$ ²⁾
1 to 4 filters	316	<i>Will be quoted.</i>
5 to 9 filters	284	
10 to 24 filters	255	
Test Data Sheets:	10	
Netw. Analyzer Curves:	15	
Cert. of Conformance:	supplied	

STOCK* FILTERS carry an „S“ in the model number (i.e. WHJS 375-5**). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.

1) Delivery Terms: FCA Andechs-Frieding (free carrier) according to **Incoterms 2000**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2000** (unversichert).

Regarding payment terms and Warranty see [Terms and Conditions](#)

Delivery Time: normally 3 to 4 weeks - depending on quantity ordered and on our work load at time of order.