




**Wainwright
Instruments GmbH**


Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

10 Resonator Cavity Design WHCG Series	Highpass Cavity Filter Passband 1920 to 3600 MHz Reject Band 1805 MHz to 1880 MHz	Model Number: WHCG 1920/3600- 1805/1880-102/10 (add connector code - see below)
--	--	--

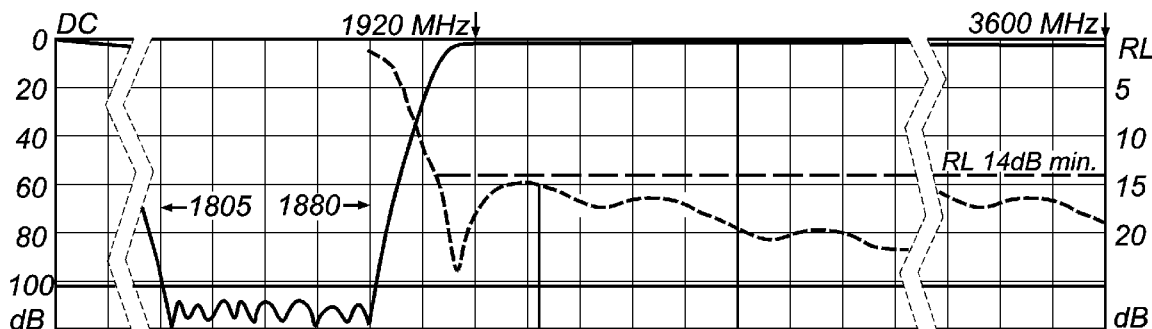

Model Numbers: WHCG 1920/3600-1805/1880-102/10SS (= SMA-F)
 WHCG 1920/3600-1805/1880-102/10EE (= N-F)

- Very Flat Passband to 3600 MHz
- Slope: 40 MHz / 102 dB



Dimensions:
 60 mm high x 30 mm wide
 265 mm long – plus connectors

Approx. weight: 0.8 kg (1.8 lbs.)



Specifications			
Passband:	1920 to 3600 MHz		
Insertion Loss in Passband:	1.2 dB max. / 1.5 dB max. at Fco (1920 MHz)		
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.		
Reject Band:	1805 to 1880 MHz		
Reject Attenuation:	102 dB min.		
Operating Temperature:	+15°C to +40°C		
Dimensions:	60 mm high x 30 x 265 mm plus connectors	Approx. Weight: 0.8 kg (1.8 lbs)	
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
Connector Code:	SMA-female = SS or N-female = EE		
Price Basis: see Ord. Inf., Terms, Warranty	PRICES:	Euro: Price based on shipment ex factory	US-\$: Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€ 1075,--	Will be quoted.
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

Delivery Time: normally 4 to 6 weeks - depending on work load in the factory at time of order.