



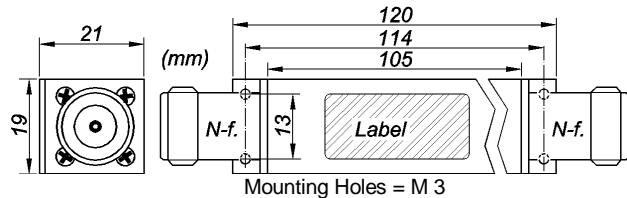

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 150 and 699 MHz	<h1 style="margin: 0;">Highpass Stock* Filters</h1> <p style="margin: 0;">Chebyshev Design</p> <p style="margin: 0;">9 Sections</p>	WHJS Series: 21 mm high
--	---	------------------------------------

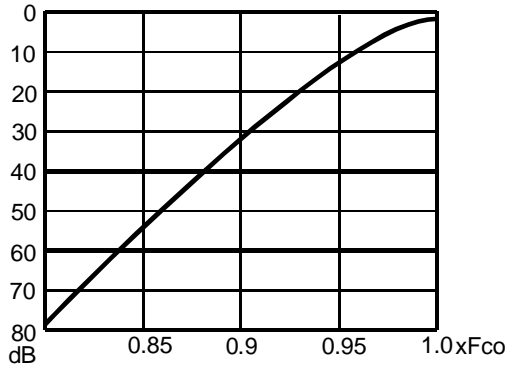

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)

Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.885 x Fco =	60 dB min. from DC to 0.835 x Fco =
WHJS 150-9**	150 to 2000	1.47 dB	1.11 dB	0.90 dB	133.0 MHz	DC to 125.0 MHz
WHJS 160-9**	160 to 2000	1.31 dB	1.02 dB	0.87 dB	142.0 MHz	DC to 134.0 MHz
WHJS 170-9**	170 to 2000	1.31 dB	1.02 dB	0.87 dB	151.0 MHz	DC to 142.0 MHz
WHJS 185-9**	185 to 2000	1.16 dB	0.94 dB	0.84 dB	164.0 MHz	DC to 155.0 MHz
WHJS 200-9**	200 to 2000	1.16 dB	0.94 dB	0.84 dB	177.0 MHz	DC to 167.0 MHz
WHJS 215-9**	215 to 2000	1.16 dB	0.94 dB	0.84 dB	190.0 MHz	DC to 180.0 MHz
WHJS 230-9**	230 to 2000	1.16 dB	0.94 dB	0.84 dB	204.0 MHz	DC to 192.0 MHz
WHJS 245-9**	245 to 2000	1.16 dB	0.94 dB	0.84 dB	217.0 MHz	DC to 205.0 MHz
WHJS 260-9**	260 to 3000	1.16 dB	0.94 dB	0.84 dB	230.0 MHz	DC to 217.0 MHz
WHJS 275-9**	275 to 3000	1.16 dB	0.94 dB	0.84 dB	243.0 MHz	DC to 230.0 MHz
WHJS 300-9**	300 to 3000	1.16 dB	0.94 dB	0.84 dB	266.0 MHz	DC to 251.0 MHz
WHJS 325-9**	325 to 3000	1.16 dB	0.94 dB	0.84 dB	288.0 MHz	DC to 271.0 MHz
WHJS 350-9**	350 to 3000	1.16 dB	0.94 dB	0.84 dB	310.0 MHz	DC to 292.0 MHz
WHJS 375-9**	375 to 3000	1.16 dB	0.94 dB	0.84 dB	332.0 MHz	DC to 313.0 MHz
WHJS 400-9**	400 to 3000	1.16 dB	0.94 dB	0.84 dB	354.0 MHz	DC to 334.0 MHz
WHJS 425-9**	425 to 3000	1.16 dB	0.94 dB	0.84 dB	376.0 MHz	DC to 355.0 MHz
WHJS 450-9**	450 to 3000	1.16 dB	0.94 dB	0.84 dB	398.0 MHz	DC to 376.0 MHz
WHJS 500-9**	500 to 3000	1.30 dB	1.02 dB	0.91 dB	443.0 MHz	DC to 418.0 MHz
WHJS 550-9**	550 to 3000	1.30 dB	1.02 dB	0.91 dB	487.0 MHz	DC to 459.0 MHz
WHJS 600-9**	600 to 4000	1.30 dB	1.02 dB	0.91 dB	531.0 MHz	DC to 501.0 MHz
WHJS 650-9**	650 to 4000	1.30 dB	1.02 dB	0.91 dB	575.0 MHz	DC to 543.0 MHz

Filters with **cut-off frequencies** that are **not listed above:**

Choose any Fco between 150 and 699 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHJS 625-9.** The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHJS 625-9** see filter WHJS 600-9**.

PRICES (each)	EURO ¹⁾	US-\$ ²⁾
1 to 4 filters	517	762
5 to 9 filters	465	620
10 to 24 filters	419	545
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

STOCK* FILTERS carry an „S“ in the model number (i.e. WHJS 375-9**). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.

- 1) **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.
- 2) **US-\$-Prices** include packaging, shipping by UPS, import charges, and customs duty. Dollar prices for shipments to the USA only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

For more details see terms & ordering information.

Delivery time if not in stock: normally 3 to 4 weeks
 - depending on work load in factory at time of order.