





**Wainwright  
Instruments GmbH**

Widdersberger Str.14  
**D82346 Andechs, Germany**  
 Tel.: +49-8152-918230 Fax: +49-8152-918255  
 E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
 Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

**10 Resonator  
Cavity Design  
WRCD Series**

**Tunable Notch Filter  
1200 to 1425 MHz**

**Model Number  
WRCD 1200/1425-0.2/40-10...**  
(add codes - see below)

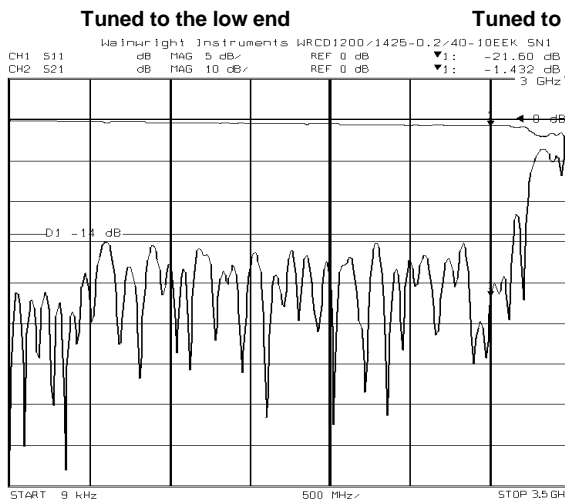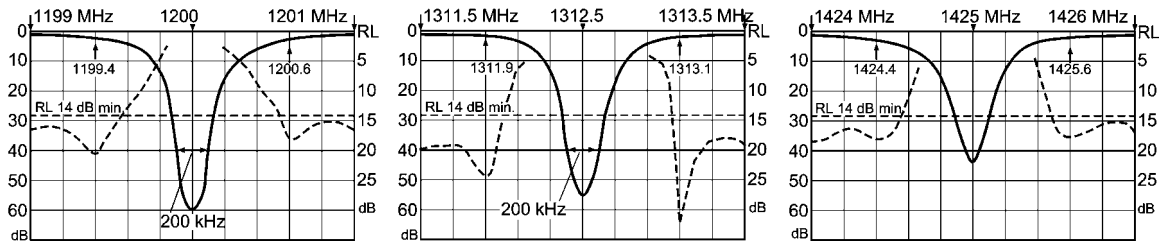

Model **WRCD 1200/1425-0.2/40-10EEK**



Available with Tuning Knobs or Screwdriver Tunable

This filter will produce up to 10 notches in the passband. The notch Fo is determined by the user by tuning each resonator. Each notch is very narrow and has 5 to 10 dB reject attenuation. Several notches can be combined by tuning them to the same frequency. This increases the notch depth and width. Attenuation will be greater at the low end of the tuning range and less at the upper end. The filter is designed to produce a 200 kHz bandwidth with at least 40 dB reject attenuation when all notches are tuned to 1312.5 MHz. The temperature specification of +15° to +40°C applies to this frequency and stability decreases away from the center towards both ends of the range. Each filter is tested over the full range and 4 curves (as shown above) are supplied on delivery.

Specifications		Model No. WRCD 1200/1425-0.2/40-10 ...		Add connector code (SS or EE) and option code (K or SD)
<b>Tuning Range:</b>	1200 to 1425 MHz			
<b>Passband Loss:</b>	1.8 dB max. DC to 3000 MHz - <u>except</u> 5 dB max. at Fo ± 600 kHz (notch corners)			
<b>Return Loss (50Ω):</b>	14 dB min. = VSWR 1.5 : 1 max.			
<b>Notch attenuation:</b>	40 dB min. at Fo (1312.5 MHz) ± 100 kHz			
<b>Oper. Temperature:</b>	+15°C to +40°C			
<b>Connector Code:</b>	SMA-female = <b>SS</b> or N-female = <b>EE</b> - both connectors on <u>one</u> 95 x 150 mm surface			
<b>Options Code:</b>	Filters with tuning knobs = <b>K</b> - Filters with slots for screwdriver tuning = <b>SD</b>			
<b>Mounting Provision:</b>	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)			
<b>Dimensions:</b>	95 mm high (plus tuning knobs) x 150 x 375 mm (plus connectors)			
Price Basis: see Ord.Inf., Terms, Warranty	<b>PRICES:</b>	<b>Euro:</b>	Price based on shipment ex factory	<b>US-\$:</b> Price includes shipping, import Charges and customs duty. *
When purchasing	1 - 4 pcs.	€2.279,-		\$ 3,325.-
Test Sheet with Analyzer Curves supplied.				
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.				

**Delivery Time:** normally 4 to 6 weeks - depending on work load in the factory at time of order.