






**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

**5 Resonator
Cavity Design
WRCT
Series**

Wide Range Tunable Notch Filter
For Laboratory Applications
Tuning Range 700 to 1000 MHz


**Model No.
WRCT700/1000-
0.2/40-5...**
 (add codes - see below)

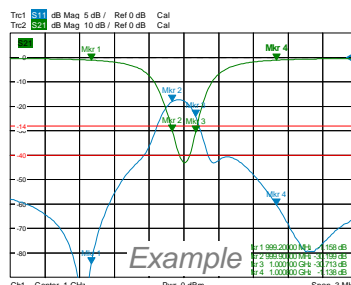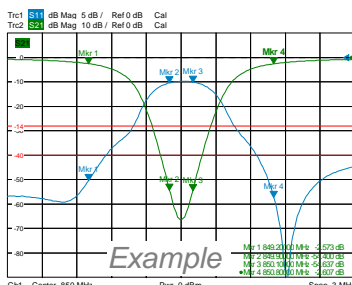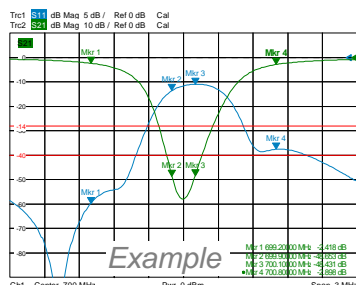

Tuned to the low end

Tuned to 850 MHz

Tuned to the high end

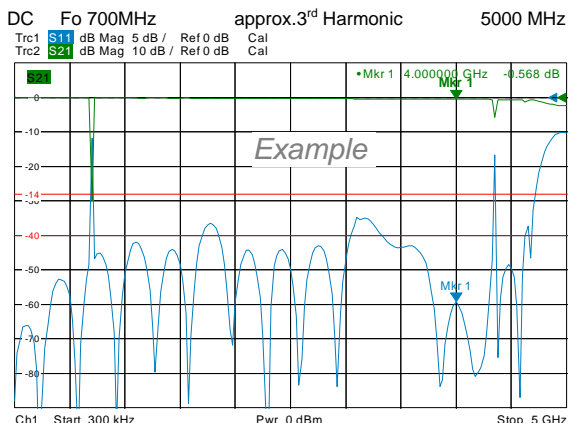

Model WRCT700/1000- 0.2/40-5SSK



approx. Weight:
3.5 kg (7.7 lbs.)

Similar to our narrow range Tunable Notch Filter, this **WIDE TUNING RANGE** model will also produce up to 5 notches in the passband. The notch Fo is determined by the user by tuning each resonator. Each notch is very narrow and has 5 to 10 dB reject attenuation. Several notches can be combined by tuning them to the same frequency. This increases the notch depth and width. **Attenuation will remain essentially the same over the tuning range.** The filter will be temperature stable if **operated in a laboratory environment (approx. 20-25°C)**. We will normally temperature stabilize the filter at 850 MHz, but if the customer specifies another frequency, where he wants the filter to be temperature stabilized, this should be specified with the order. Each filter is tested over the full range and 4 curves are included in the delivery.

| Specifications | Model No. WRCT 700/1000-0.2/40-5 | Add connector code (SS or EE) and option code (K or SD) |
|---|--|---|
| Tuning Range: | 700 to 1000 MHz | |
| Passband Loss: | 1 dB max. DC to 4000 MHz except 3 rd harmonic notch 3 dB max. at Fo ± 0.8 MHz (notch corners) | |
| Return Loss (50 Ω): | 14 dB min. = VSWR 1.5 : 1 max. | |
| Notch attenuation: | 40 dB min. at Notch Fo ± 100 kHz | |
| Oper. Temperature: | Laboratory Environment | |
| Connector Codes: | SMA-female = SS or N-female = EE - on each 107 x 60 mm surface | |
| Options Codes: | Filters with tuning knobs = K - filters with slots for screwdriver tuning = SD | |
| Mounting Provision: | 4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website) | |
| Dimensions: | 107 mm high (plus tuning knobs) x 60 x 300 mm (plus connectors) | |
| Prices: When purchasing 1 - 4 pcs. | Euro: € 1.167,- | US-\$: <u>Will be quoted.</u> |
| Delivery Terms: | FCA Andechs-Frieding (free carrier) according to Incoterms 2000 . In Deutschland liefern wir frachtfrei gemäß CPT Incoterms 2000 (unversichert). Regarding payment terms and Warranty see Terms and Conditions . | |
| Test Sheet with Analyzer Curves supplied. | | |
| Delivery Time: normally 4 to 6 weeks - depending on work load in the factory at time of order. | | |