





**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

5 Resonator Ultra Stable Cavity Design WRCD Series	<h2>Band Reject Filter</h2>	Model Number: WRCD1747/1748- 1743/1752-32/5
	Reject Band 1747 to 1748 MHz Passbands DC to 1743 & 1752 to 3300 MHz	(add connector code - see below)

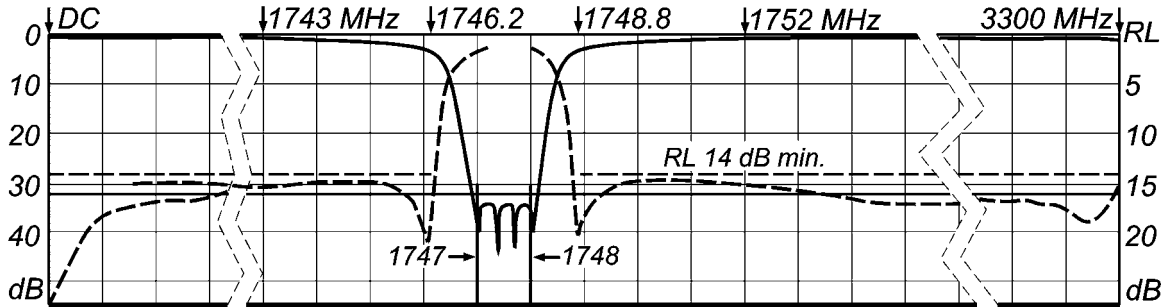

Model Numbers:
 WRCD1747/1748-1743/1752-32/5SS (= SMA-F) or: WRCD1747/1748-1743/1752-32/5EE (= N-F)

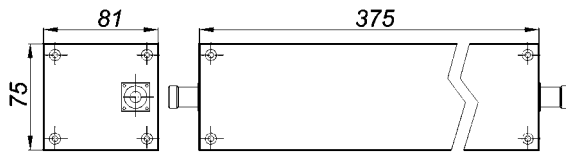

Dimensions:
 81 mm high x 75 mm wide
 375 mm long – plus connectors

Approx. weight: 3.1 kg (6.8 lbs.)



- Ultra Stable
- Very Flat Passband to 3300 MHz
- Slopes: 4 MHz – 32 dB

Specifications			
Reject Band:	1747 to 1748 MHz		
Reject Attenuation:	32 dB min.		
Passbands:	DC to 1743 MHz and 1752 to 3300 MHz		
Passband Corners:	1746.2 MHz and 1748.8 MHz		
Passband Loss:	1.0 dB max. / 5.0 dB max. at passband corners		
Return Loss (50Ω) in Passband:	12 dB min. = VSWR 1.5 : 1 max.		
Operating Temperature:	+15°C to +40°C		
Dimensions & approx. Weight:	81 mm high x 75 x 375 mm plus connectors	<u>Approx.</u> Weight: 3.1 kg (6.8 lbs)	
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
Connector Code:	SMA-female = SS or N-female = EE		
Price Basis: see Ord. Inf., Terms, Warranty	PRICES:	Euro: Price based on shipment ex factory	US-\$: Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€950,--	\$ 1,500.--
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.