



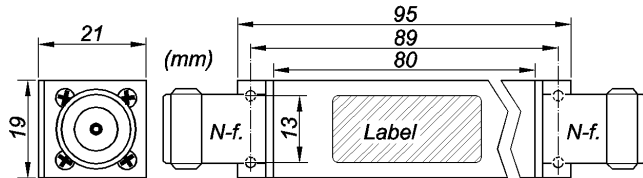

**Wainwright  
Instruments GmbH**

Widdersberger Str.14  
**D82346 Andechs, Germany**  
Tel.: +49-8152-918230 Fax: +49-8152-918255  
E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

<b>Fco</b> between <b>25 and 549 MHz</b>	<b>Lowpass Stock* Filters</b> Cauer (Elliptic) Design <b>C9/50**</b>	<b>WLJS Series:</b> 21 mm high
--	--	-----------------------------------

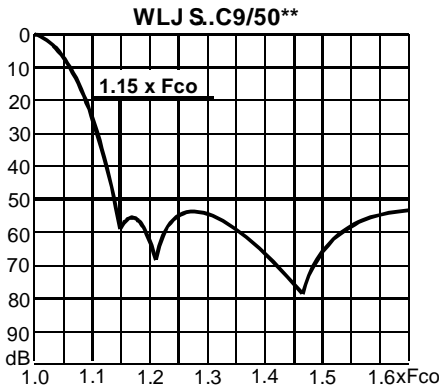

Mounting Holes = M 3

**Connector Codes:\*\***  
E (N-female) F (N-male) S (SMA-female) T (SMA-male)

**Return Loss (50 Ω) in Passband:**  
near Fco: 20 dB min. = VSWR 1.23 : 1 max.  
at the worst point: 14 dB min. = VSWR 1.5 : 1 max.

Model Number	Passband DC to Fco	Max. Insertion Loss			Reject Attenuation 50 dB min. 1.15 x Fco to .....MHz
		at Fco	at 0.97 x Fco	at 0.9 x Fco	
WLJS 25.0 C9/50**	25 MHz	1.50 dB	1.10 dB	0.80 dB	28.8 MHz to 8000 MHz
WLJS 30.0 C9/50**	30 MHz	1.50 dB	1.10 dB	0.80 dB	34.5 MHz to 8000 MHz
WLJS 35.0 C9/50**	35 MHz	1.50 dB	1.10 dB	0.80 dB	40.3 MHz to 8000 MHz
WLJS 40.0 C9/50**	40 MHz	1.50 dB	1.10 dB	0.80 dB	46.0 MHz to 8000 MHz
WLJS 45.0 C9/50**	45 MHz	1.40 dB	1.00 dB	0.70 dB	51.8 MHz to 8000 MHz
WLJS 50.0 C9/50**	50 MHz	1.40 dB	1.00 dB	0.70 dB	57.5 MHz to 8000 MHz
WLJS 60.0 C9/50**	60 MHz	1.40 dB	1.00 dB	0.70 dB	69.0 MHz to 8000 MHz
WLJS 70.0 C9/50**	70 MHz	1.40 dB	1.00 dB	0.70 dB	80.5 MHz to 8000 MHz
WLJS 80.0 C9/50**	80 MHz	1.40 dB	1.00 dB	0.70 dB	92.0 MHz to 8000 MHz
WLJS 90.0 C9/50**	90 MHz	1.20 dB	0.90 dB	0.60 dB	104 MHz to 8000 MHz
WLJS 100 C9/50**	100 MHz	1.20 dB	0.90 dB	0.60 dB	115 MHz to 8000 MHz
WLJS 115 C9/50**	115 MHz	1.20 dB	0.90 dB	0.60 dB	132 MHz to 8000 MHz
WLJS 130 C9/50**	130 MHz	1.20 dB	0.90 dB	0.60 dB	150 MHz to 8000 MHz
WLJS 150 C9/50**	150 MHz	1.20 dB	0.90 dB	0.60 dB	173 MHz to 8000 MHz
WLJS 175 C9/50**	175 MHz	1.20 dB	0.90 dB	0.60 dB	201 MHz to 8000 MHz
WLJS 200 C9/50**	200 MHz	1.10 dB	0.80 dB	0.60 dB	230 MHz to 8000 MHz
WLJS 225 C9/50**	225 MHz	1.10 dB	0.80 dB	0.60 dB	259 MHz to 8000 MHz
WLJS 250 C9/50**	250 MHz	1.10 dB	0.80 dB	0.60 dB	288 MHz to 8000 MHz
WLJS 275 C9/50**	275 MHz	1.10 dB	0.80 dB	0.60 dB	316 MHz to 8000 MHz
WLJS 300 C9/50**	300 MHz	1.10 dB	0.80 dB	0.60 dB	345 MHz to 8000 MHz
WLJS 350 C9/50**	350 MHz	1.10 dB	0.80 dB	0.60 dB	403 MHz to 8000 MHz
WLJS 400 C9/50**	400 MHz	1.10 dB	0.80 dB	0.60 dB	460 MHz to 8000 MHz
WLJS 450 C9/50**	450 MHz	1.10 dB	0.80 dB	0.60 dB	518 MHz to 8000 MHz
WLJS 500 C9/50**	500 MHz	1.10 dB	0.80 dB	0.60 dB	575 MHz to 8000 MHz

**Filters with cut-off frequencies that are not listed above:**

Choose any Fco between 25 MHz and 549 MHz and assign a **Model Number** by inserting the desired Fco.  
**Example:** The Model Number of a 9 degree/50dB Cauer Lowpass Filter with a cut-off frequency of 120 MHz is **WLJS 120C9/50SS**. The insertion loss and dimensions of the listed **lower frequency** see **WLJS 115C9/50SS**.

PRICES (each)	EURO <sup>1)</sup>	US-\$ <sup>2)</sup>
1 to 4 filters	372	578
5 to 9 filters	334	456
10 to 24 filters	300	395
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

- 1) **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.
- 2) **US-\$-Prices** include packaging, shipping by UPS, import charges and customs duty. Dollar prices for shipments to the US only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

\*) **STOCK\* FILTERS** carry an "S" in the model number (i.e. WLJS 120C9/50SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance supplied. Prices for Test Sheets see above.

**For more details see terms & ordering information.**

**Delivery time if not in stock:** normally 3 to 4 weeks – depending on work load in the factory at time of order.