



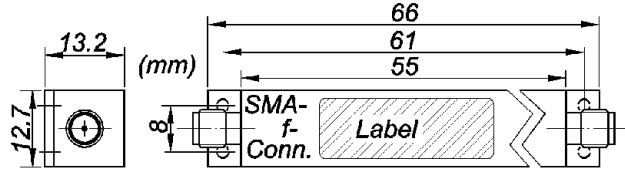

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 185 and 699 MHz	Highpass Standard* Filters Chebyshev Design 4 Sections	WHKS Series: 13.2 mm high (SMA-female connectors)
--	---	--

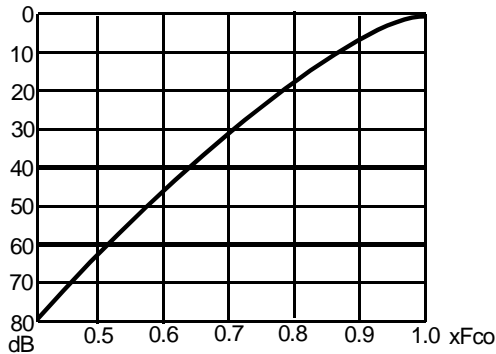

Mounting Holes $\varnothing = 2.1$ mm

Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.645 x Fco	60 dB min. from DC to 0.525 x Fco
WHKS 185-4SS	185 to 2000	0.50 dB	0.49 dB	0.48 dB	119 MHz	DC to 97.1 MHz
WHKS 200-4SS	200 to 2000	0.50 dB	0.49 dB	0.48 dB	129 MHz	DC to 105 MHz
WHKS 215-4SS	215 to 2000	0.50 dB	0.49 dB	0.48 dB	139 MHz	DC to 113 MHz
WHKS 230-4SS	230 to 2000	0.50 dB	0.49 dB	0.48 dB	148 MHz	DC to 121 MHz
WHKS 245-4SS	245 to 2000	0.50 dB	0.49 dB	0.48 dB	158 MHz	DC to 129 MHz
WHKS 260-4SS	260 to 3000	0.50 dB	0.49 dB	0.48 dB	168 MHz	DC to 137 MHz
WHKS 275-4SS	275 to 3000	0.50 dB	0.49 dB	0.48 dB	177 MHz	DC to 144 MHz
WHKS 300-4SS	300 to 3000	0.50 dB	0.49 dB	0.48 dB	194 MHz	DC to 158 MHz
WHKS 325-4SS	325 to 3000	0.50 dB	0.49 dB	0.48 dB	210 MHz	DC to 171 MHz
WHKS 350-4SS	350 to 3000	0.50 dB	0.49 dB	0.48 dB	226 MHz	DC to 184 MHz
WHKS 375-4SS	375 to 3000	0.50 dB	0.49 dB	0.48 dB	242 MHz	DC to 197 MHz
WHKS 400-4SS	400 to 3000	0.50 dB	0.49 dB	0.48 dB	258 MHz	DC to 210 MHz
WHKS 425-4SS	425 to 3000	0.50 dB	0.49 dB	0.48 dB	274 MHz	DC to 223 MHz
WHKS 450-4SS	450 to 3000	0.50 dB	0.49 dB	0.48 dB	290 MHz	DC to 236 MHz
WHKS 500-4SS	500 to 3000	0.50 dB	0.49 dB	0.48 dB	323 MHz	DC to 263 MHz
WHKS 550-4SS	550 to 3000	0.50 dB	0.49 dB	0.48 dB	355 MHz	DC to 289 MHz
WHKS 600-4SS	600 to 4000	0.50 dB	0.49 dB	0.48 dB	387 MHz	DC to 315 MHz
WHKS 650-4SS	650 to 4000	0.50 dB	0.49 dB	0.48 dB	419 MHz	DC to 341 MHz

Filters with **cut-off frequencies** that are **not listed above**:

Choose any Fco between 185 and 699 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHKS 625-4SS. The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHKS 625-4SS - see filter WHKS 600-4SS.

PRICES (each)	EURO	US-\$
1 to 4 filters	226	Will be quoted
5 to 9 filters	203	
10 to 24 filters	183	
Test Report with Analyzer Curves:	15	
Cert. of Conformance:	supplied	

Delivery Terms: FCA Andechs-Frieding (free carrier) according to **Incoterms 2000**

Regarding payment terms and Warranty see [Terms and Conditions](#)

In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2000** (unversichert).

Delivery Time: normally 3 to 4 weeks - depending on quantity ordered and on our work load at time of order.

*) **Standard Filters** carry an „S“ in the model number (i.e. WHKS 600-4SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.