





**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

10 Resonator Cavity Design WRCG Series	Band Reject Filter	Model Number: WRCG 2402/2480- 2382/2500-52/10
	Reject Band 2402 MHz to 2480 MHz Passbands DC to 2382 and 2500 to 4000 MHz	(add connector code - see below)

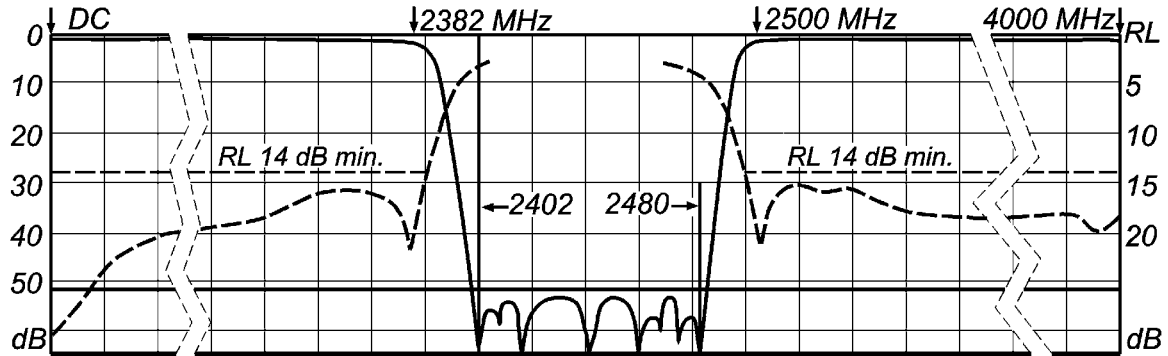

Dimensions:
 60 mm high x 30 mm wide
 265 mm long – plus connectors

Approx. Weight: 0.8 kg (1.8 lbs)



- **Slopes: 20 MHz / 52 dB**
 - **Very Flat Passband to 4000 MHz**
- Model Numbers:
WRCG 2402/2480-2382/2500-52/10SS (=SMA-F)
WRCG 2402/2480-2382/2500-52/10EE (=N-F)

Specifications			
Reject Band:	2402 to 2480 MHz		
Reject Attenuation:	52 dB min.		
Passbands:	DC to 2382 MHz and 2500 to 4000 MHz		
Passband Loss:	2.0 dB max. / 4.0 dB at passband corners		
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.		
Operating Temperature:	+15°C to +40°C		
Dimensions & approx. Weight:	60 mm high x 30 x 265 mm plus connectors	Approx. Weight: 0.8 kg (1.8 lbs)	
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
Connector Code:	SMA-female = SS or N-female = EE		
Price Basis: see Ord. Inf., Terms, Warranty	PRICES:	Euro: Price based on shipment ex factory	US-\$: Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€1075,--	\$ 1625.--
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.