



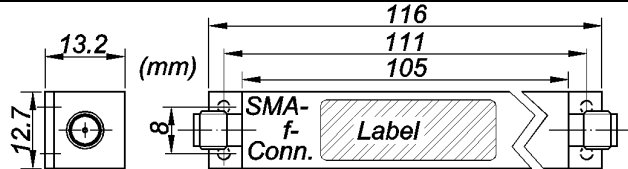

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
Tel.: +49-8152-918230 Fax: +49-8152-918255
E-Mail: info@wainwright-filters.com
Internet: www.wainwright-filters.com

Fco between 185 and 699 MHz	<h2 style="margin: 0;">Highpass Stock* Filters</h2> <p style="margin: 0;">Chebyshev Design 9 Sections</p>	WHKS Series: 13.2 mm high (SMA-female connectors)
--	--	--

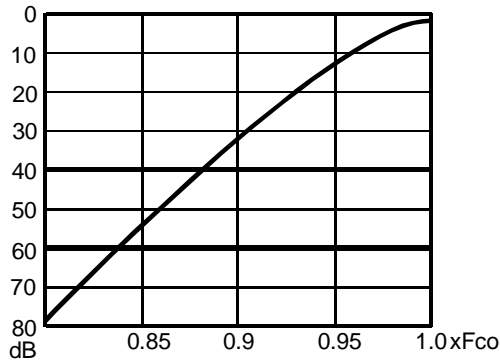

Mounting Holes $\varnothing = 2.1$ mm

Return Loss (50 Ω) in Passband:
near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.885 x Fco =	60 dB min. from DC to 0.835 x Fco =
WHKS 185-9SS	185 to 2000	1.45 dB	1.10 dB	0.98 dB	164.0 MHz	DC to 155 MHz
WHKS 200-9SS	200 to 2000	1.45 dB	1.10 dB	0.98 dB	177.0 MHz	DC to 167 MHz
WHKS 215-9SS	215 to 2000	1.45 dB	1.10 dB	0.98 dB	190.0 MHz	DC to 180 MHz
WHKS 230-9SS	230 to 2000	1.45 dB	1.10 dB	0.98 dB	204.0 MHz	DC to 192 MHz
WHKS 245-9SS	245 to 2000	1.45 dB	1.10 dB	0.98 dB	217.0 MHz	DC to 205 MHz
WHKS 260-9SS	260 to 3000	1.45 dB	1.10 dB	0.98 dB	230.0 MHz	DC to 217 MHz
WHKS 275-9SS	275 to 3000	1.45 dB	1.10 dB	0.98 dB	243.0 MHz	DC to 230 MHz
WHKS 300-9SS	300 to 3000	1.45 dB	1.10 dB	0.98 dB	266.0 MHz	DC to 251 MHz
WHKS 325-9SS	325 to 3000	1.45 dB	1.10 dB	0.98 dB	288.0 MHz	DC to 271 MHz
WHKS 350-9SS	350 to 3000	1.45 dB	1.10 dB	0.98 dB	310.0 MHz	DC to 292 MHz
WHKS 375-9SS	375 to 3000	1.45 dB	1.10 dB	0.98 dB	332.0 MHz	DC to 313 MHz
WHKS 400-9SS	400 to 3000	1.45 dB	1.10 dB	0.98 dB	354.0 MHz	DC to 334 MHz
WHKS 425-9SS	425 to 3000	1.45 dB	1.10 dB	0.98 dB	376.0 MHz	DC to 355 MHz
WHKS 450-9SS	450 to 3000	1.45 dB	1.10 dB	0.98 dB	398.0 MHz	DC to 376 MHz
WHKS 500-9SS	500 to 3000	1.45 dB	1.10 dB	0.98 dB	443.0 MHz	DC to 418 MHz
WHKS 550-9SS	550 to 3000	1.45 dB	1.10 dB	0.98 dB	487.0 MHz	DC to 459 MHz
WHKS 600-9SS	600 to 4000	1.45 dB	1.10 dB	0.98 dB	531.0 MHz	DC to 501 MHz
WHKS 650-9SS	650 to 4000	1.45 dB	1.10 dB	0.98 dB	575.0 MHz	DC to 543 MHz

Filters with **cut-off frequencies that are not listed above:**

Choose any Fco between 185 and 699 MHz and assign a **Model Number** by inserting the desired Fco.

Example = WHKS 625-9SS. The insertion loss of the lower frequency filter applies.

Example: insertion loss of filter WHKS 625-9SS see filter WHKS 600-9SS.

PRICES (each)	EURO ¹⁾	US-\$ ²⁾
1 to 4 filters	414	643
5 to 9 filters	372	500
10 to 24 filters	335	440
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

¹⁾ **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.

²⁾ **US-\$-Prices include packaging, shipping by UPS, import charges, and customs duty.** Dollar prices for shipments to the US only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

For more details see terms & ordering information.

Delivery time if not in stock: normally 3 to 4 weeks - depending on work load in factory at time of order.

STOCK* FILTERS carry an „S“ in the model number (i.e. WHKS 600-9SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance is supplied. Prices for Test Sheets see above.