



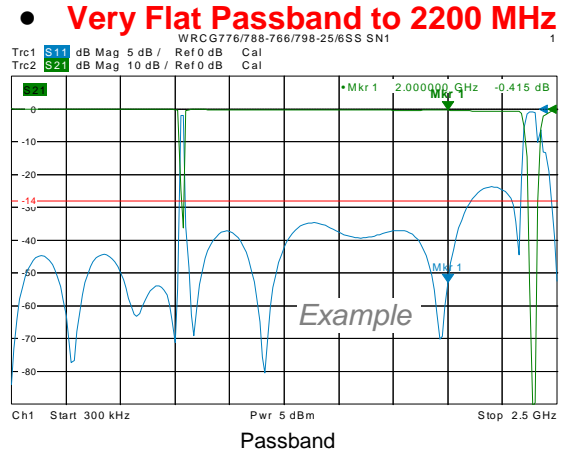



**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

6 Resonator Cavity Design WRCGV Series	<h2 style="margin: 0;">Band Reject Filter</h2> <p style="margin: 0;">Reject Band 776 to 788 MHz Passbands DC to 766 & 798 to 2200 MHz</p>	Model Number: WRCGV 776/788- 766/798-25/6 <small>(add connector code – see below)</small>
---	---	---

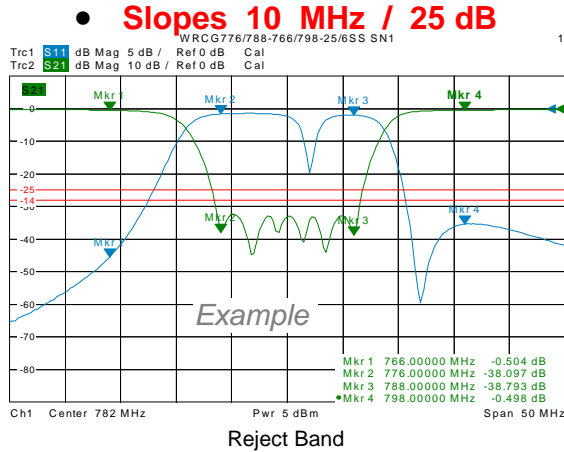

Model Numbers: WRCGV 776/788-766/798-25/6SS (= SMA-F) or WRCGV 776/788-766/798-25/6EE (= N-F)

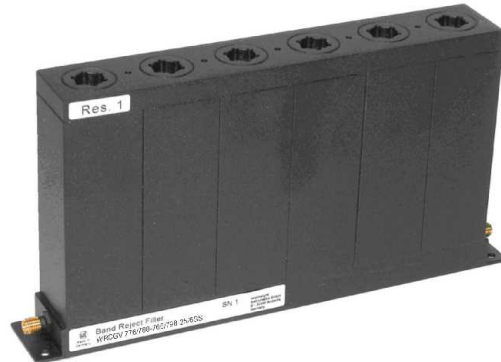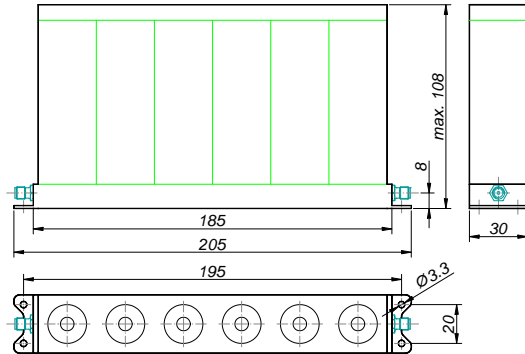

Specifications	
Reject Band:	776 to 788 MHz
Reject Attenuation:	25 dB min.
Passbands:	DC to 766 MHz and 798 to 2200 MHz
Passband Loss:	0.75 dB max.
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.
Operating Temperature:	+15°C to +40°C
Dimensions:	108 mm high (max.) x 30 x 185 mm Approx. Weight: 1.1 kg (2.4 lbs) plus flanges & connectors
Mounting Provision:	10 mm flanges with Ø 3.3 holes
Connector Code:	SMA-female = SS or N-female = EE
Prices: when purchasing 1 - 4 pcs.	Euro: € 756,- US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA Andechs-Frieding (free carrier) according to Incoterms 2000 . In Deutschland liefern wir frachtfrei gemäß CPT Incoterms 2000 (unversichert). Regarding payment terms and Warranty see Terms and Conditions .
Test Sheet with Analyzer Curves supplied.	

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.