




**Wainwright
Instruments GmbH**


Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

8 Resonator Cavity Design WRCGV Series	Band Reject Filter Reject Band 890 to 915 MHz Passbands DC to 880 & 925 to 2500 MHz	Model Number: WRCGV 890/915- 880/925-40/8 _____ (add connector code - see below)
--	--	--

- **Slopes 10 MHz / 40 dB**
- **Very Flat Passband to 2500 MHz**

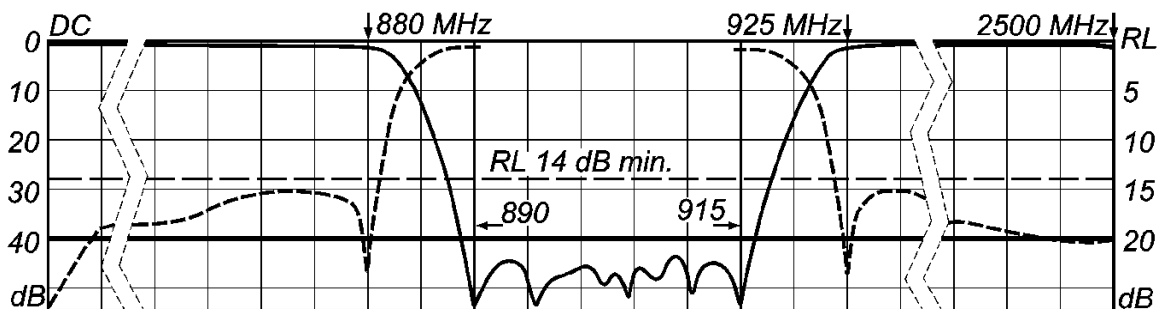

Model Numbers: WRCGV 890/915-880/925-40/8SS (= SMA-F) QI WRCGV 890/915-880/925-40/8EE (= N-F)

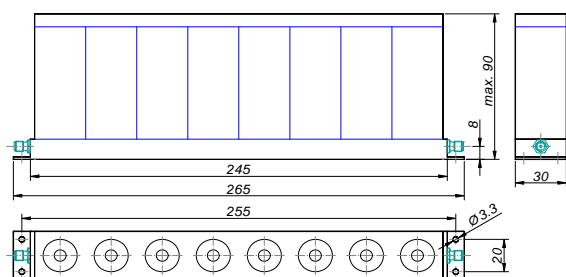

Specifications		
Reject Band:	890 to 915 MHz	
Reject Attenuation:	40 dB min.	
Passbands:	DC to 880 MHz and 925 to 2500 MHz	
Passband Corners:	880 MHz and 925 MHz	
Passband Loss:	1.0 dB max. / 1.5 dB max. at passband corners	
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.	
Operating Temperature:	+15°C to +40°C	
Dimensions:	90 mm high (max.) x 30 x 245 mm Approx. Weight: 1.2 kg (2.6 lbs) plus flanges & connectors	
Mounting Provision:	10 mm flanges with Ø 3.3 holes	
Connector Code:	SMA-female = SS or N-female = EE	
Prices: when purchasing 1 - 4 pcs.	Euro: € 978,-	US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA <u>Andechs-Frieding</u> (free carrier) according to Incoterms 2000 . In Deutschland liefern wir frachtfrei gemäß CPT Incoterms 2000 (unversichert). Regarding payment terms and Warranty see Terms and Conditions .	
Test Sheet with Analyzer Curves supplied.		

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.