




**Wainwright
Instruments GmbH**


Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

8 Resonator Cavity Design WRCGV Series	Band Reject Filter Reject Band 880 to 915 MHz Passbands DC to 860 & 935 to 2500 MHz	Model Number: WRCGV 880/915- 860/935-60/8 _____ (add connector code - see below)
------------------------------------------------------------	--------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------

- Slopes 20 MHz / 60 dB
- Very Flat Passband to 2500 MHz

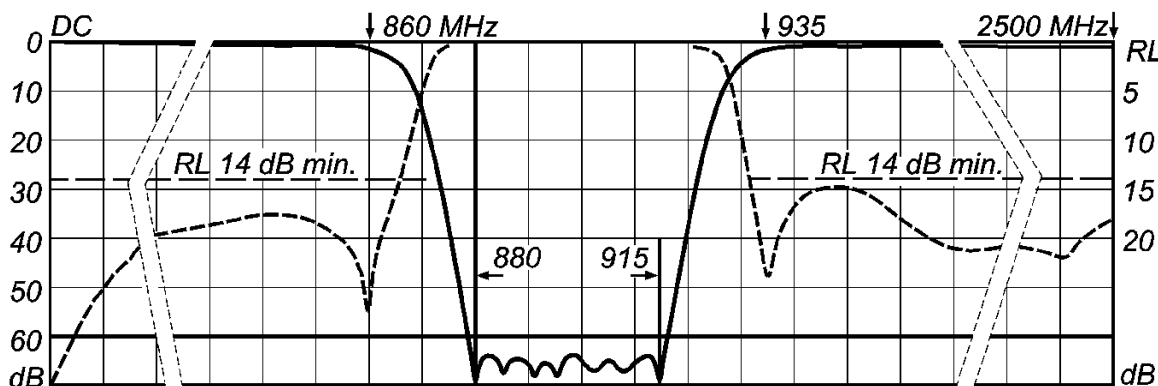

Model Numbers: WRCGV 880/915-860/935-60/8SS (= SMA-F) WRCGV 880/915-860/935-60/8EE (= N-F)

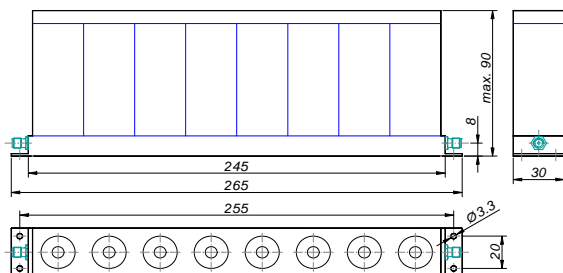

Specifications	
Reject Band:	880 to 915 MHz
Reject Attenuation:	60 dB min.
Passbands:	DC to 860 MHz and 935 to 2500 MHz
Passband Corners:	860 MHz and 935 MHz
Passband Loss:	1.0 dB max. / 1.5 dB max. at passband corners
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.
Operating Temperature:	+15°C to +40°C
Dimensions:	90 mm high (max.) x 30 x 245 mm Approx. Weight: 1.2 kg (2.6 lbs) plus flanges & connectors
Mounting Provision:	10 mm flanges with Ø 3.3 holes
Connector Code:	SMA-female = SS or N-female = EE
Prices: when purchasing 1 - 4 pcs.	Euro: € 978,- US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA Andechs-Frieding (free carrier) according to Incoterms 2000 . In Deutschland liefern wir frachtfrei gemäß CPT Incoterms 2000 (unversichert). Regarding payment terms and Warranty see Terms and Conditions .
Test Sheet with Analyzer Curves supplied.	

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.