



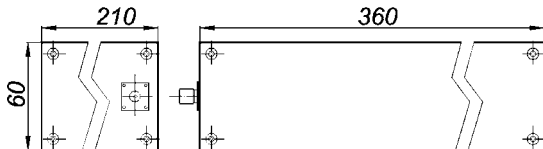

**Wainwright  
Instruments GmbH**

Widdersberger Str.14  
**D82346 Andechs, Germany**  
 Tel.: +49-8152-918230 Fax: +49-8152-918255  
 E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
 Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

<b>6 Resonator</b> Ultra Stable Cavity Design <b>WRCT Series</b>	<b>Band Reject Filter</b>	<b>Model Number:</b> <b>WRCT370.8/375.8-</b>
	Reject Band 370.8 to 375.8 MHz Passbands DC to 368.8 and 377.8 to 1000 MHz	<b>368.8/377.8-40/6</b> (add connector code - see below)

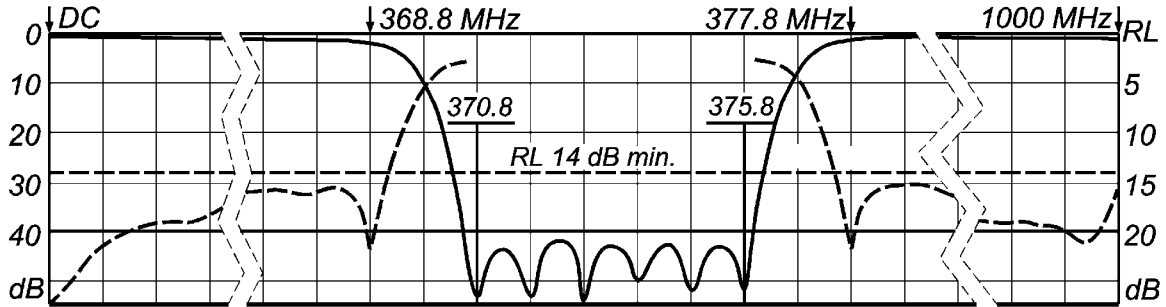

**Dimensions:**  
 210 mm high x 60 mm wide  
 360 mm long – plus connectors

**Approx. weight:** 6 kg (13.2 lbs.)

**Model Numbers:**  
**WRCT370.8/375.8-368.8/377.8-40/6SS** (= SMA-F)  
**WRCT370.8/375.8-368.8/377.8-40/6EE** (= N-F)



- **Ultra Stable**
- **Very Flat Passband to 1000 MHz**
- **Slopes: 2 MHz / 40 dB**

<b>Specifications</b>			
<b>Reject Band:</b>	370.8 to 375.8 MHz		
<b>Reject Attenuation:</b>	40 dB min.		
<b>Passbands:</b>	DC to 368.8 MHz and 377.8 to 1000 MHz		
<b>Passband Loss:</b>	2.0 dB max. <u>except:</u> 2.5 dB max. at 368.8 and 377.8 MHz		
<b>Return Loss (50Ω) in Passband:</b>	14 dB min. = VSWR 1.5 : 1 max.		
<b>Operating Temperature:</b>	+15°C to +40°C		
<b>Dimensions &amp; approx. Weight:</b>	210 mm high x 60 x 360 mm plus connectors	<u>Approx. Weight:</u> 6 kg ( 13.2 lbs)	
<b>Mounting Provision:</b>	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
<b>Connector Code:</b>	SMA-female = <b>SS</b> or N-female = <b>EE</b>		
Price Basis: see Ord. Inf., Terms, Warranty	<b>PRICES:</b>	<b>Euro:</b> Price based on shipment ex factory	<b>US-\$:</b> Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	<b>€1.431,--</b>	<b>\$ 2,185.--</b>
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

**Delivery Time:** normally 3 to 4 weeks - depending on work load in the factory at time of order.