



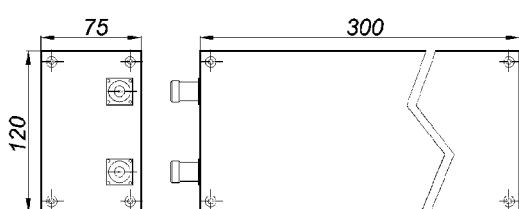

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

10 Resonator Ultra Stable Cavity Design WRCT Series	<h2>Band Reject Filter</h2>	Model Number: WRCT 1985/1990- 1981/1994-40/10
	Reject Band 1985 to 1990 MHz Passbands DC to 1981 & 1994 to 3600 MHz	(add connector code - see below)

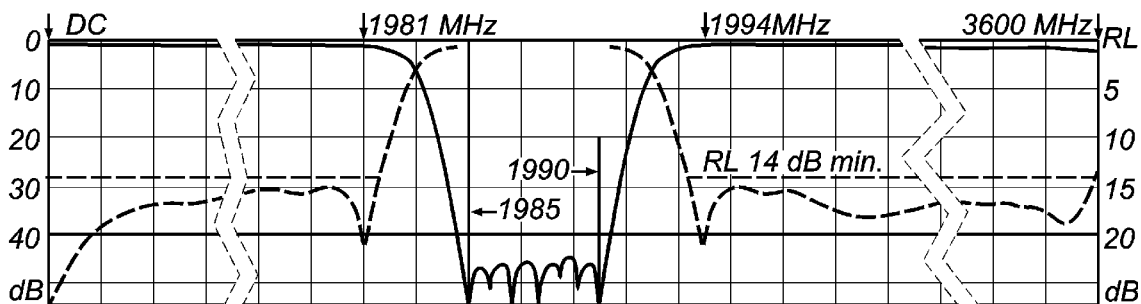

Dimensions:
 75 mm high x 120 mm wide
 300 mm long – plus connectors



- 1 Slopes: 4 MHz / 40 dB**
- 1 Ultra Stable**
- 1 Very Flat Passband to 3600 MHz**

Model Numbers:
WRCT 1985/1990-1981/1994-40/10SS
 (= SMA-F Connectors)
WRCT 1985/1990-1981/1994-40/10EE
 (= N-F Connectors)

Specifications	
Reject Band:	1985 to 1990 MHz
Reject Attenuation:	40 dB min.
Passbands:	DC to 1981 MHz and 1994 to 3600 MHz
Passband Loss:	1.5 dB max. <u>except:</u> 2.0 dB max. at 1981 MHz and 1994 MHz
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.
Operating Temperature:	+15°C to +40°C
Dimensions & approx. Weight:	75 mm high x 120 x 300 mm plus connectors Approx. Weight: 4.45 kg (9,8 lbs)
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)
Connector Code:	SMA-female = SS or N-female = EE - both connectors on <u>one</u> 75 x 120 mm surface
Prices: When purchasing 1 - 4 pcs.	Euro: € 1.759,- US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA Andechs-Frieding (free carrier) according to Incoterms 2000 . In Deutschland liefern wir frachtfrei gemäß CPT Incoterms 2000 (unversichert). Regarding payment terms and Warranty see Terms and Conditions .
Test Sheet with Analyzer Curves supplied.	
Delivery Time: Will be quoted.	