



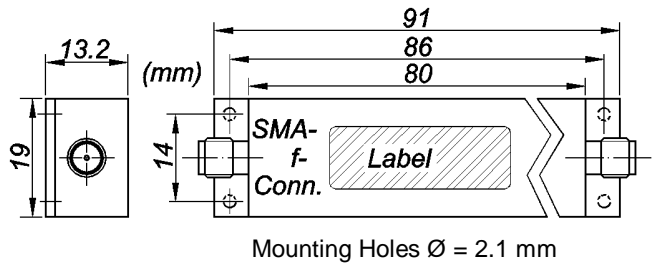

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 25 and 549 MHz	Lowpass Stock* Filters Cauer (Elliptic) Design C9/50SS	WLKS Series: 13.2 mm high (SMA-female connectors)
--	---	---

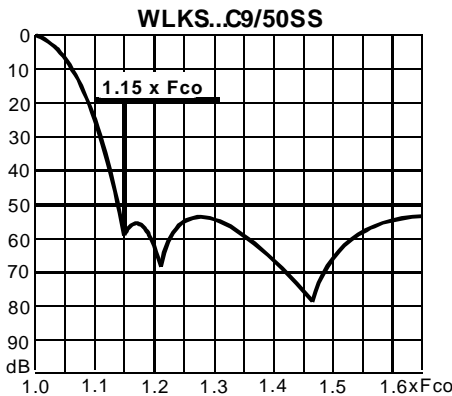

Return Loss (50 Ω) in Passband:
 near Fco: **20 dB typical** = VSWR 1.23 : 1 max.
 at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband	Max. Insertion Loss			Reject Attenuation
	DC to Fco	at Fco	at 0.97 x Fco	at 0.9 x Fco	50 dB min. 1.15 x Fco toMHz
WLKS 25.0 C9/50SS	25 MHz	1.50 dB	1.10 dB	0.80 dB	28,8 MHz to 8000 MHz
WLKS 30.0 C9/50SS	30 MHz	1.50 dB	1.10 dB	0.80 dB	34,5 MHz to 8000 MHz
WLKS 35.0 C9/50SS	35 MHz	1.50 dB	1.10 dB	0.80 dB	40,3 MHz to 8000 MHz
WLKS 40.0 C9/50SS	40 MHz	1.50 dB	1.10 dB	0.80 dB	46,0 MHz to 8000 MHz
WLKS 45.0 C9/50SS	45 MHz	1.40 dB	1.10 dB	0.70 dB	51,8 MHz to 8000 MHz
WLKS 50.0 C9/50SS	50 MHz	1.40 dB	1.00 dB	0.70 dB	57,5 MHz to 8000 MHz
WLKS 60.0 C9/50SS	60 MHz	1.40 dB	1.00 dB	0.70 dB	69,0 MHz to 8000 MHz
WLKS 70.0 C9/50SS	70 MHz	1.40 dB	1.00 dB	0.70 dB	80,5 MHz to 8000 MHz
WLKS 80.0 C9/50SS	80 MHz	1.40 dB	1.10 dB	0.70 dB	92,0 MHz to 8000 MHz
WLKS 90.0 C9/50SS	90 MHz	1.20 dB	0.90 dB	0.60 dB	104 MHz to 8000 MHz
WLKS 100 C9/50SS	100 MHz	1.20 dB	0.90 dB	0.60 dB	115 MHz to 8000 MHz
WLKS 115 C9/50SS	115 MHz	1.20 dB	0.90 dB	0.60 dB	132 MHz to 8000 MHz
WLKS 130 C9/50SS	130 MHz	1.20 dB	0.90 dB	0.60 dB	150 MHz to 8000 MHz
WLKS 150 C9/50SS	150 MHz	1.20 dB	0.90 dB	0.60 dB	173 MHz to 8000 MHz
WLKS 175 C9/50SS	175 MHz	1.20 dB	0.90 dB	0.60 dB	201 MHz to 8000 MHz
WLKS 200 C9/50SS	200 MHz	1.10 dB	0.80 dB	0.60 dB	230 MHz to 8000 MHz
WLKS 225 C9/50SS	225 MHz	1.10 dB	0.80 dB	0.60 dB	259 MHz to 8000 MHz
WLKS 250 C9/50SS	250 MHz	1.10 dB	0.80 dB	0.60 dB	288 MHz to 8000 MHz
WLKS 275 C9/50SS	275 MHz	1.10 dB	0.80 dB	0.60 dB	316 MHz to 8000 MHz
WLKS 300 C9/50SS	300 MHz	1.10 dB	0.80 dB	0.60 dB	345 MHz to 8000 MHz
WLKS 350 C9/50SS	350 MHz	1.10 dB	0.80 dB	0.60 dB	403 MHz to 8000 MHz
WLKS 400 C9/50SS	400 MHz	1.10 dB	0.80 dB	0.60 dB	460 MHz to 8000 MHz
WLKS 450 C9/50SS	450 MHz	1.10 dB	0.80 dB	0.60 dB	518 MHz to 8000 MHz
WLKS 500 C9/50SS	500 MHz	1.10 dB	0.80 dB	0.60 dB	575 MHz to 8000 MHz

Filters with cut-off frequencies that are not listed above:

Choose any Fco between 25 MHz and 549 MHz and assign a **Model Number** by inserting the desired Fco.

Example: The Model Number of a 9 degree/50dB Cauer Lowpass Filter with a cut-off frequency of 120 MHz is **WLKS 120C9/50SS**. The insertion loss and dimensions of the listed **lower** frequency see **WLKS 115C9/50SS**.

PRICES (each)	EURO ¹⁾	US-\$ ²⁾
1 to 4 filters	291	500
5 to 9 filters	261	360
10 to 24 filters	235	315
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

¹⁾ **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.

²⁾ **US-\$-Prices** include packaging, shipping by UPS, import charges and customs duty. Dollar prices for shipments to the US only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

***) STOCK* FILTERS** carry an "S" in the model number (i.e. WLKS 120C9/50SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance supplied. Prices for Test Sheets see above.

For more details see terms & ordering information.

Delivery time if not in stock: normally 3 to 4 weeks – depending on work load in the factory at time of order.