



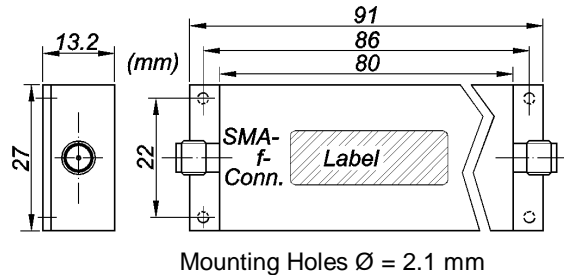

**Wainwright  
Instruments GmbH**

Widdersberger Str.14  
**D82346 Andechs, Germany**  
Tel.: +49-8152-918230 Fax: +49-8152-918255  
E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

<b>Fco</b> between <b>0.075 and 24 MHz</b>	<b>Lowpass Stock* Filters</b> Cauer (Elliptic) Design <b>C9/60SS</b>	<b>WLKS Series:</b> 13.21 mm high (SMA-female connectors)
--	--	---

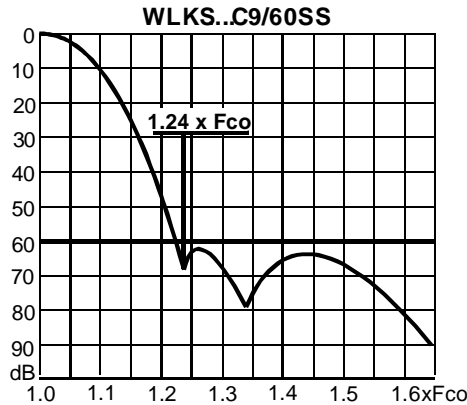

**Return Loss (50 Ω) in Passband:**  
near Fco: **20 dB typical** = VSWR 1.23 : 1 max.  
at the worst point: **14 dB min.** = VSWR 1.5 : 1 max.

Model Number	Passband	Max. Insertion Loss			Reject Attenuation
	DC to Fco	at Fco	at 0.97 x Fco	at 0.9 x Fco	60 dB min. 1.24 x Fco to .....MHz
WLKS 0.075 C9/60SS	0.075 MHz	1.10 dB	0.90 dB	0.80 dB	0.093 MHz to 8000 MHz
WLKS 0.10 C9/60SS	0.10 MHz	1.10 dB	0.90 dB	0.80 dB	0.124 MHz to 8000 MHz
WLKS 0.15 C9/60SS	0.15 MHz	1.10 dB	0.90 dB	0.70 dB	0.186 MHz to 8000 MHz
WLKS 0.20 C9/60SS	0.20 MHz	1.10 dB	0.90 dB	0.70 dB	0.248 MHz to 8000 MHz
WLKS 0.30 C9/60SS	0.30 MHz	1.10 dB	0.90 dB	0.70 dB	0.372 MHz to 8000 MHz
WLKS 0.40 C9/60SS	0.40 MHz	1.10 dB	0.90 dB	0.70 dB	0.496 MHz to 8000 MHz
WLKS 0.50 C9/60SS	0.50 MHz	1.10 dB	0.90 dB	0.70 dB	0.620 MHz to 8000 MHz
WLKS 0.65 C9/60SS	0.65 MHz	1.10 dB	0.90 dB	0.70 dB	0.806 MHz to 8000 MHz
WLKS 0.80 C9/60SS	0.80 MHz	1.00 dB	0.80 dB	0.60 dB	0.992 MHz to 8000 MHz
WLKS 1.00 C9/60SS	1.00 MHz	1.00 dB	0.80 dB	0.60 dB	1.24 MHz to 8000 MHz
WLKS 1.50 C9/60SS	1.50 MHz	1.00 dB	0.80 dB	0.60 dB	1.86 MHz to 8000 MHz
WLKS 2.00 C9/60SS	2.00 MHz	1.00 dB	0.80 dB	0.60 dB	2.48 MHz to 8000 MHz
WLKS 3.00 C9/60SS	3.00 MHz	1.00 dB	0.80 dB	0.60 dB	3.72 MHz to 8000 MHz
WLKS 4.00 C9/60SS	4.00 MHz	1.00 dB	0.80 dB	0.60 dB	4.96 MHz to 8000 MHz
WLKS 5.00 C9/60SS	5.00 MHz	1.00 dB	0.80 dB	0.60 dB	6.2 MHz to 8000 MHz
WLKS 7.50 C9/60SS	7.50 MHz	1.20 dB	1.20 dB	0.90 dB	9.3 MHz to 8000 MHz
WLKS 10.0 C9/60SS	10.00 MHz	1.70 dB	1.30 dB	1.00 dB	12.4 MHz to 8000 MHz
WLKS 15.0 C9/60SS	15.00 MHz	1.70 dB	1.30 dB	1.00 dB	18.6 MHz to 8000 MHz
WLKS 20.0 C9/60SS	20.00 MHz	1.60 dB	1.20 dB	0.90 dB	24.8 MHz to 8000 MHz

**Filters with cut-off frequencies that are not listed above:**

Choose any Fco between 75 kHz and 24 MHz and assign a **Model Number** by inserting the desired Fco.  
**Example:** The Model Number of a 9 degree/60dB Cauer Lowpass Filter with a cut-off frequency of 12 MHz is **WLKS 12C9/60SS**. The insertion loss and dimensions of the listed **lower frequency** see **WLKS 10C9/60SS**.

PRICES (each)	EURO <sup>1)</sup>	US-\$ <sup>2)</sup>
1 to 4 filters	335	552
5 to 9 filters	300	410
10 to 24 filters	270	356
Test Data Sheets:	10	12
Netw. Analyzer Curves:	15	18
Cert. of Conformance:	supplied	

<sup>1)</sup> **EURO-Prices** are based on shipment ex factory, except for delivery within Germany, where shipping is included.

<sup>2)</sup> **US-\$-Prices** include packaging, shipping by UPS, import charges and customs duty. Dollar prices for shipments to the US only. **Customers from the USA are welcome to purchase at EURO-Prices** and carry postage/freight and all import charges directly.

\*) **STOCK\* FILTERS** carry an "S" in the model number (i.e. WLKS 10C9/60SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance supplied. Prices for Test Sheets see above.

**For more details see terms & ordering information.**

**Delivery time if not in stock:** normally 3 to 4 weeks – depending on work load in the factory at time of order.