



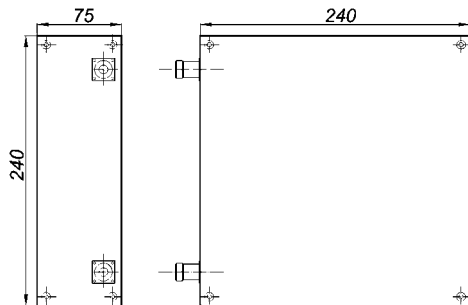

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

12 Resonator Ultra Stable Cavity Design WRCT Series	<h2 style="margin:0;">Band Reject Filter</h2> <p style="margin:0;">Reject Band 2110 to 2170 MHz Passbands DC to 2102 & 2178 to 3600 MHz</p>	Model Number: WRCT 2110/2170- 2102/2178-50/12 (add connector code - see below)
--	--	--

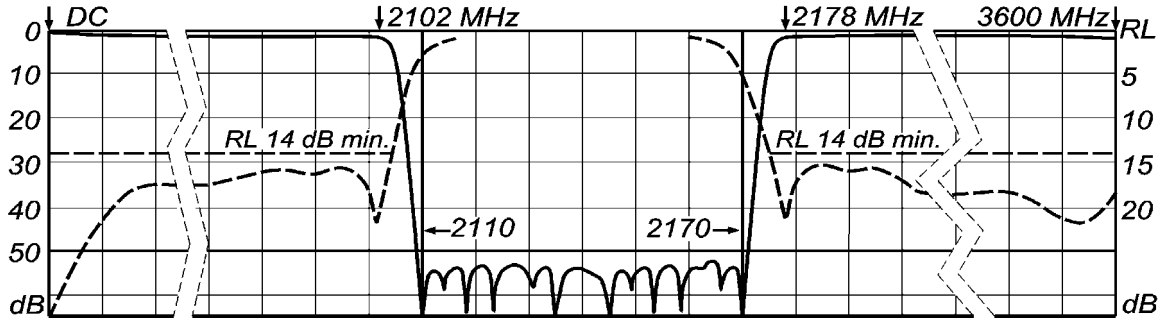

Dimensions:
 75 mm high x 240 mm wide
 240 mm long – plus connectors

Model Numbers:

WRCT 2110/2170-2102/2178-50/12SS (= SMA-F Connectors)
 WRCT 2110/2170-2102/2178-50/12EE (= N-F Connectors)



Approx. Weight:
 4.5 kg (9.9 lbs)

- Slopes: 8 MHz / 50 dB
- Ultra Stable
- Very Flat Passband to 3600 MHz

Specifications			
Reject Band:	2110 to 2170 MHz		
Reject Attenuation:	50 dB min.		
Passbands:	DC to 2102 MHz and 2178 to 3600 MHz		
Passband Loss:	2 dB max. <u>except:</u> 2.5 dB max. at 2102 MHz and 2178 MHz		
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.		
Operating Temperature:	+15°C to +40°C		
Dimensions & approx. Weight:	75 mm high x 240 x 240 mm plus connectors	<u>Approx. Weight:</u> 4.5 kg (9.9 lbs)	
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
Connector Code:	SMA-female = SS or N-female = EE - both connectors on <u>one</u> 75 x 240 mm surface		
Price Basis: see Ord. Inf., Terms, Warranty	PRICES:	Euro: Price based on shipment ex factory	US-\$: Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€2.273,--	\$ 3,285.--
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.