



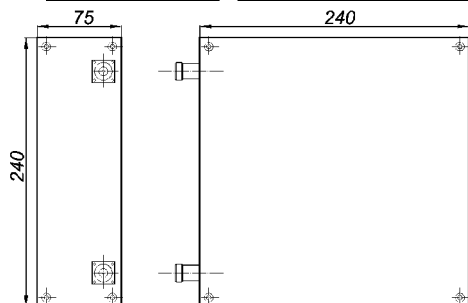

**Wainwright
Instruments GmbH**

Widdersberger Str.14
D82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

12+9 Resonator Ultra Stable Cavity Design WRCTF Series	<h2 style="margin:0;">Band Reject Filter</h2> <p style="margin:0;">Reject Band 1930 to 1990 MHz Passbands DC to 1928 & 1992 to 3300 MHz</p>	Model Number: WRCTF 1930/1990- 1928/1992-40/12+9 <small>(add connector code - see below)</small>
---	--	--

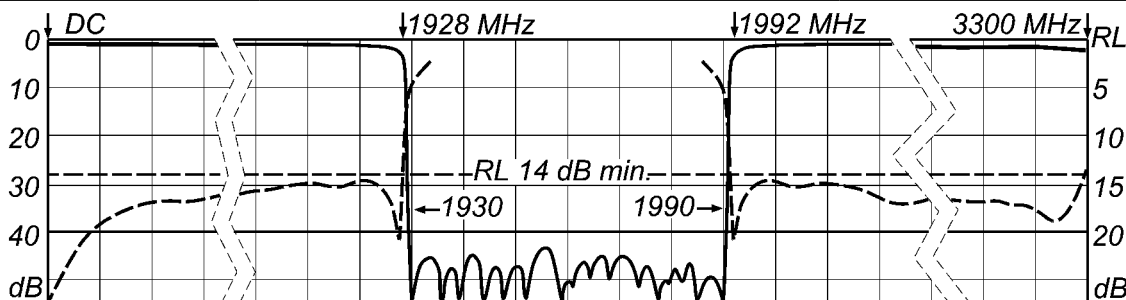

Dimensions:
 75 mm high x 240 mm wide
 240 mm long – plus connectors

Model Numbers:

WRCTF 1930/1990-1928/1992-40/12+9SS (= SMA-F Connectors)
 WRCTF 1930/1990-1928/1992-40/12+9EE (= N-F Connectors)



Approx. Weight:
 7 kg (15.4 lbs)

- **Slopes: 2 MHz / 40 dB**
- **Ultra Stable**
- **Very Flat Passband to 3300 MHz**

Specifications		
Reject Band:	1930 to 1990 MHz	
Reject Attenuation:	40 dB min.	
Passbands:	DC to 1928 MHz and 1992 to 3300 MHz	
Passband Loss:	2.5 dB max. <u>except:</u> 5 dB max. at passband corners	
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.	
Operating Temperature:	+15°C to +40°C	
Dimensions & approx. Weight:	75 mm high x 240 x 240 mm plus connectors	Approx. Weight: 7 kg (15.4 lbs)
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)	
Connector Code:	SMA-female = SS or N-female = EE - both connectors on <u>one</u> 75 x 240 mm surface	
Prices: When purchasing 1 - 4 pcs.	Euro: € 3.200,-	US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA <u>Andechs-Frieding</u> (free carrier) according to <u>Incoterms 2000</u> . In Deutschland liefern wir frachtfrei gemäß CPT <u>Incoterms 2000</u> (unversichert). Regarding payment terms and Warranty see Terms and Conditions .	
Test Sheet with Analyzer Curves supplied.		
Delivery Time: will be quoted		