



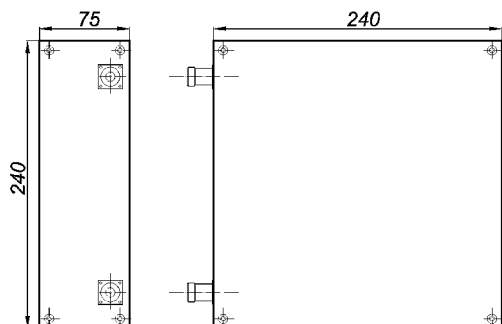

**Wainwright  
Instruments GmbH**

Widdersberger Str.14  
**D82346 Andechs, Germany**  
 Tel.: +49-8152-918230 Fax: +49-8152-918255  
 E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
 Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

<b>12+12 Resonator</b> Ultra Stable Cavity Design WRCTG Series	<b>Band Reject Filter</b> Reject Band 2110 to 2170 MHz Passbands DC to 2107 & 2173 to 3600 MHz	Model Number: WRCTG 2110/2170- 2107/2173-55/12+12 (add connector code - see below)
---	--	---

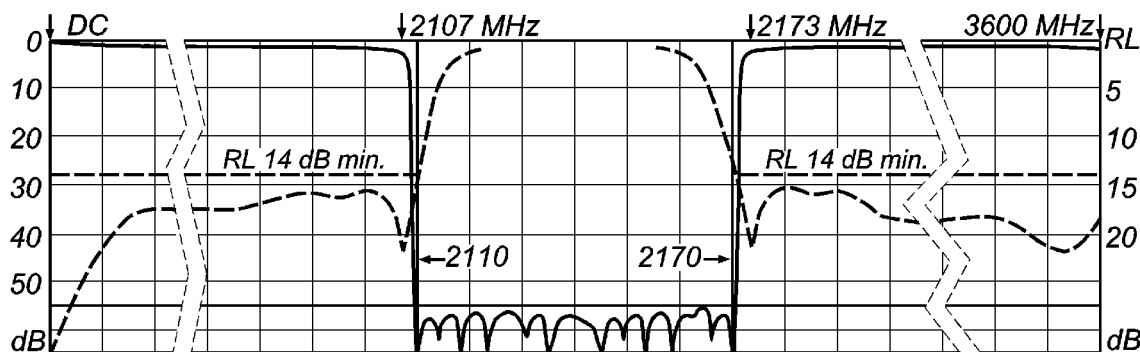

**Model Numbers:**

WRCTG 2110/2170-2107/2173-55/12+12SS (= SMA-F Connectors)  
 WRCTG 2110/2170-2107/2173-55/12+12EE (= N-F Connectors)



Approx. Weight:  
6 kg (13.2 lbs)

- 1 Slopes: 3 MHz / 55 dB
- 1 Ultra Stable
- 1 Very Flat Passband to 3600 MHz

Specifications			
<b>Reject Band:</b>	2110 to 2170 MHz		
<b>Reject Attenuation:</b>	55 dB min.		
<b>Passbands:</b>	DC to 2107 MHz and 2173 to 3600 MHz		
<b>Passband Loss:</b>	2.5 dB max. except: 5.0 dB max. at passband corners		
<b>Return Loss (50Ω) in Passbd.:</b>	14 dB min. = VSWR 1.5 : 1 max.		
<b>Operating Temperature:</b>	+15°C to +40°C		
<b>Dimensions &amp; approx. Weight:</b>	75 mm high x 240 x 240 mm plus connectors		Approx. Weight: 6 kg ( 13.2 lbs)
<b>Mounting Provision:</b>	4 x M4 threaded holes each on all sides – see drawing <a href="#">UMP-1</a> (Website)		
<b>Connector Code:</b>	SMA-female = <b>SS</b> or N-female = <b>EE</b> - both connectors on one 75 x 240 mm surface		
Price Basis: see Ord. Inf., Terms, Warranty	<b>PRICES:</b>	<b>Euro:</b> Price based on shipment ex factory	<b>US-\$:</b> Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€3.451,-	<a href="#">Will be quoted.</a>
Test Sheet with Analyzer Curves supplied.			
* Prices in US-\$ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

**Delivery Time:** normally 4 to 6 weeks - depending on work load in the factory at time of order.