




# Manually Tunable Band Pass Filter WTBCJV6-3600-4200-200-900-60SSK

Range 3600 to 4200 MHz    Bandwidth 200 MHz    Slopes 350 MHz    Attenuation 60 dB min.

<b>Passband</b>	200 MHz bandwidth tunable from 3600 to 4200 MHz
<b>Insertion Loss</b>	1.5 dB max. at Fo (2 dB max. at Corners)
<b>Return Loss</b>	14 dB min. (VSWR 1.5:1 max.)
<b>Stopband</b>	DC to Fo - 450 MHz and Fo + 450 to 8000 MHz
<b>Stopband Attenuation</b>	60 dB min.
<b>Operating Temperature</b>	15 °C to 45 °C
<b>Power Handling</b>	will be quoted on request (See our <a href="#">warranty</a> )
<b>Dimensions (L x W x H)</b>	max. 140 x 20 x 40 mm (connectors may protrude)
<b>Approx. Weight</b>	0.46 kg
<b>Mounting Provision</b>	10 mm flanges on both ends with M3 threaded holes
<b>Connector 1</b>	SMA - Female
<b>Connector 2</b>	SMA - Female
<b>Tuning</b>	Tuning with knobs


## Typical Performance

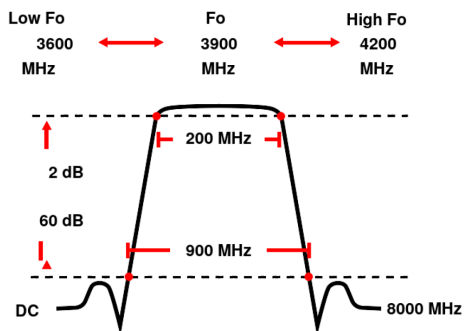

## 6 Section Cavity Design



## Technical drawing

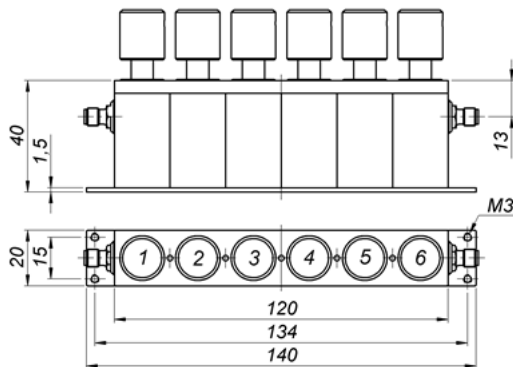

### Connector Options:

SMA - Female  
SMA - Male  
N - Female  
N - Male  
BNC - Female  
BNC - Male

## Unit prices

<b>1-4 pieces</b>	<b>5-9 pieces</b>	<b>10-24 pieces</b>	<b>25-49 pieces</b>	<b>50-99 pieces</b>	<b>100+ pieces</b>
1990 €	1891 €	1791 €	1692 €	1592 €	1493 €

## Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

**Wainwright Instruments GmbH**  
Graf-Rasso-Street. 1  
82346 Andechs  
Germany

**Contact**  
Phone: +49 (0) 8152 918230  
Telefax: +49 (0) 8152 918255  
Email: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)

**Legal notes**  
Managing director: Terence Wainwright  
Registering court: Amtsgericht München Abt.B Nr. 58192  
VAT Id number: DE 128249711