



Absorptive Filter (BP/BR)

WACX12+12-DC-5835/5855-5925/5945-6500-50/60S3


Passband 1: DC to 5835 MHz

Passband 2: 5855 to 5925 MHz

Passband 3: 5945 to 6500 MHz

Passband	Band 2 (Band Pass) 5855 to 5925 MHz	Band 1 & 3 (Band Reject) DC to 5835 MHz && 5945 to 6500 MHz
Insertion Loss	6 dB max.	4.5 dB max.
Return Loss	14 dB min.	12 dB min.
Stopbands	DC to 5835 & 5945 to 6500 MHz	5855 to 5925 MHz
Stopband Attenuation	50 & 50 dB min.	60 dB min.
Operating Temperature	15 °C to 45 °C	
Power Handling	max. 100 W CW into a 2:1 VSWR (See our warranty)	
Dimensions (L x W x H)	max. 209 x 75 x 34 mm (connectors may protrude)	
Approx. Weight	1.85 kg	
Mounting Provision	10 mm Flanges on both ends with 3.3 mm holes	
Connector Common	SMA - Female	
Connector 1	SMA - Female	
Connector 2	SMA - Female	


Typical Performance

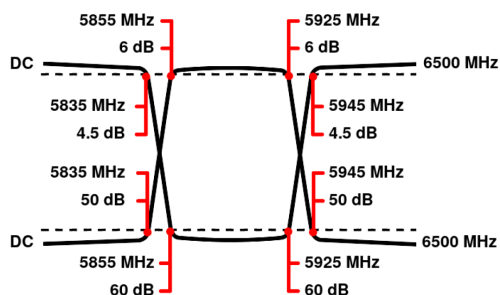

12+12 Section Cavity Design



Technical drawing

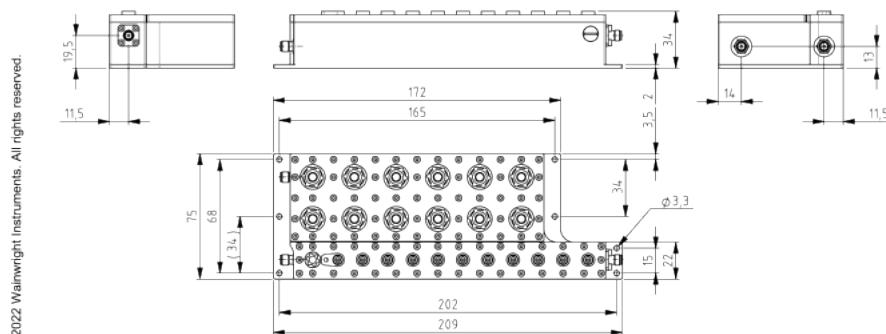

Connector Options:

SMA - Female
SMA - Male
N - Female

Unit prices

1-4 pieces
4380 €

5-9 pieces
4161 €

10-24 pieces
3942 €

25-49 pieces
3723 €

50-99 pieces
3504 €

100- pieces
3285 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711