




Band Reject / Notch Filter

WRCGV6-752.5-761.5-771.5-780.5-35SS


Stopband 761.5 to 771.5 MHz Slopes 9 MHz Bandwidth 10 MHz Attenuation 35 dB min.

Passband	DC to 752.5 MHz and 780.5 to 2150 MHz
Insertion Loss	0.65 dB max. (1 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	766.5 (Fo) $\pm$ 5 MHz = 761.5 to 771.5 MHz
Stopband Attenuation	35 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 205 x 30 x 105 mm (connectors may protrude)
Approx. Weight	1.05 kg
Mounting Provision	10 mm flanges on both ends with 3.3 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

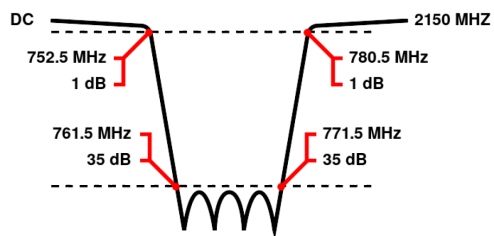

6 Section Cavity Design



Technical drawing

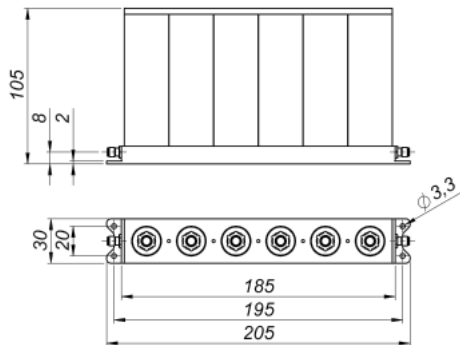

Connector Options:

SMA - Female
N - Female

Unit prices

1-4 pieces
1290 €

5-9 pieces
1226 €

10-24 pieces
1161 €

25-49 pieces
1097 €

50-99 pieces
1032 €

100+ pieces
968 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**