




Band Reject / Notch Filter

WRCT16-759.5-761.5-771.5-773.5-60SS


Stopband 761.5 to 771.5 MHz Slopes 2 MHz Bandwidth 10 MHz Attenuation 60 dB min.

Passband	DC to 759.5 MHz and 773.5 to 2150 MHz
Insertion Loss	1 dB max. (2.25 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	766.5 (Fo) $\pm$ 5 MHz = 761.5 to 771.5 MHz
Stopband Attenuation	60 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 270 x 240 x 108 mm (connectors may protrude)
Approx. Weight	10 kg
Mounting Provision	15 mm flanges on both ends with 5.2 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

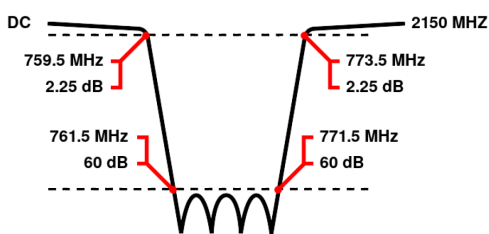

16 Section Cavity Design

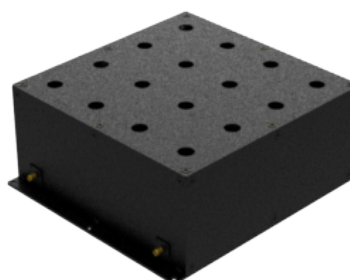

Technical drawing

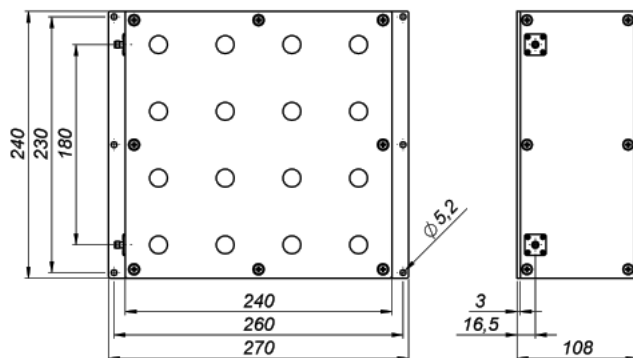

Connector Options:

SMA - Female
SMA - Male
N - Female
N - Male
BNC - Female
BNC - Male

Unit prices

1-4 pieces
3090 €

5-9 pieces
2936 €

10-24 pieces
2781 €

25-49 pieces
2627 €

50-99 pieces
2472 €

100+ pieces
2318 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**