




Band Reject / Notch Filter

WRCGV14-1515-1525-1559-1569-60SS

Stopband 1525 to 1559 MHz Slopes 10 MHz Bandwidth 34 MHz Attenuation 60 dB min.

Passband	DC to 1515 MHz and 1569 to 4000 MHz
Insertion Loss	1.25 dB max. (2.75 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	1542 (Fo) $\pm$ 17 MHz = 1525 to 1559 MHz
Stopband Attenuation	60 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 235 x 60 x 65 mm (connectors may protrude)
Approx. Weight	1.6 kg
Mounting Provision	10 mm flanges on both ends with 3.3 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

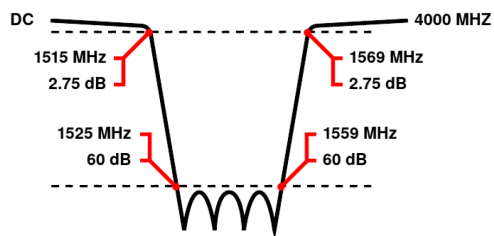

14 Section Cavity Design



Technical drawing

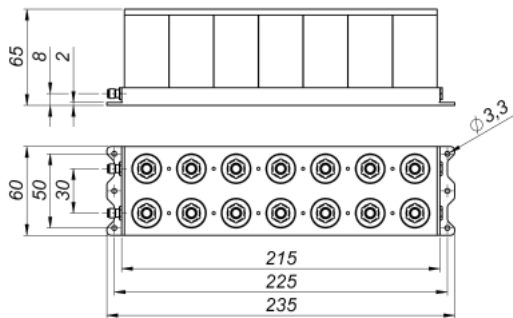

Connector Options:

SMA - Female
N - Female

Unit prices	1-4 pieces	5-9 pieces	10-24 pieces	25-49 pieces	50-99 pieces	100+ pieces
	2090 €	1986 €	1881 €	1777 €	1672 €	1568 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**