




Band Reject / Notch Filter

WRCJV10-2553-2568-2618-2633-30SS


Stopband 2568 to 2618 MHz Slopes 15 MHz Bandwidth 50 MHz Attenuation 30 dB min.

Passband	DC to 2553 MHz and 2633 to 6000 MHz
Insertion Loss	0.75 dB max. (1.5 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	2593 (Fo) $\pm$ 25 MHz = 2568 to 2618 MHz
Stopband Attenuation	30 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 220 x 20 x 50 mm (connectors may protrude)
Approx. Weight	0.65 kg
Mounting Provision	7.5 mm flanges on both ends with M3 threaded holes
Connector 1	SMA - Female
Connector 2	SMA - Female

Typical Performance

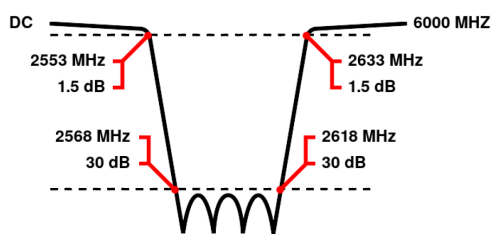


10 Section Cavity Design

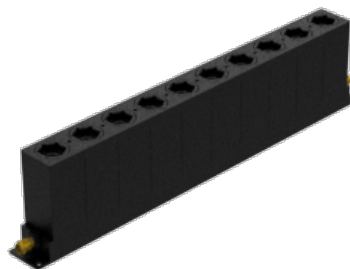

Technical drawing

©2013 Wainwright Instruments. All rights reserved.

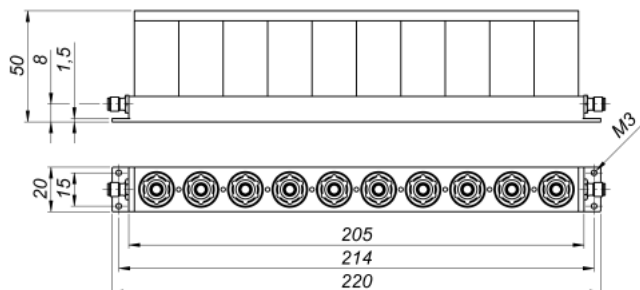

Connector Options:

SMA - Female
N - Female

Unit prices

1-4 pieces
1590 €

5-9 pieces
1511 €

10-24 pieces
1431 €

25-49 pieces
1352 €

50-99 pieces
1272 €

100+ pieces
1193 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711