




Band Reject / Notch Filter

WRCT10-2038.5-2042.5-2047.5-2051.5-60SS


Stopband 2042.5 to 2047.5 MHz Slopes 4 MHz Bandwidth 5 MHz Attenuation 60 dB min.

Passband	DC to 2038.5 MHz and 2051.5 to 4000 MHz
Insertion Loss	1.25 dB max. (2 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	2045 (Fo) $\pm$ 2.5 MHz = 2042.5 to 2047.5 MHz
Stopband Attenuation	60 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 330 x 120 x 76 mm (connectors may protrude)
Approx. Weight	4.6 kg
Mounting Provision	15 mm flanges on both ends with 5.2 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

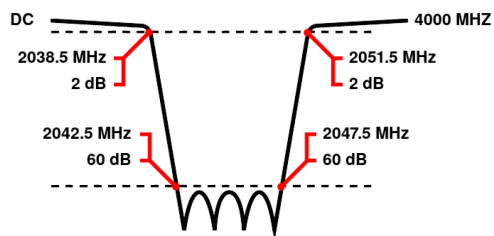

10 Section Cavity Design

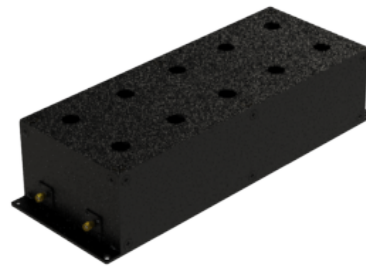

Technical drawing

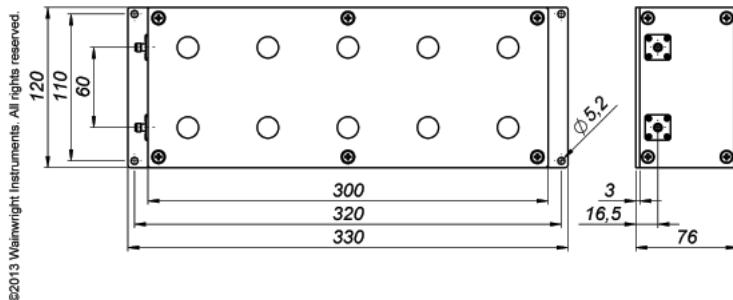

Connector Options:

SMA - Female
SMA - Male
N - Female
N - Male
BNC - Female
BNC - Male

Unit prices	1-4 pieces	5-9 pieces	10-24 pieces	25-49 pieces	50-99 pieces	100+ pieces
	2490 €	2366 €	2241 €	2117 €	1992 €	1868 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711