




Band Reject / Notch Filter

WRCQV14-3050-3300-3800-4050-60SS

Stopband 3300 to 3800 MHz Slopes 250 MHz Bandwidth 500 MHz Attenuation 60 dB min.

Passband	DC to 3050 MHz and 4050 to 6000 MHz
Insertion Loss	1.25 dB max. (1.5 dB max. at Corners)
Return Loss	12 dB min. (VSWR 1.67:1 max.)
Stopband	3550 (Fo) $\pm$ 250 MHz = 3300 to 3800 MHz
Stopband Attenuation	60 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 125 x 30 x 30 mm (connectors may protrude)
Approx. Weight	1.1 kg
Mounting Provision	7.5 mm flanges on both ends with 2.5 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

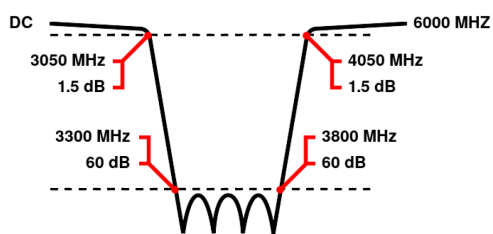

14 Section Cavity Design



Technical drawing

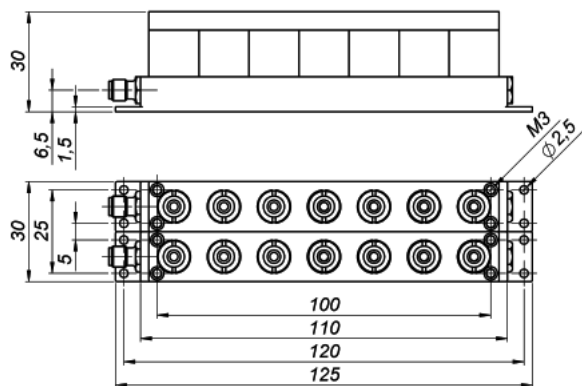

Connector Options:
SMA - Female

Unit prices

1-4 pieces
1940 €

5-9 pieces
1843 €

10-24 pieces
1746 €

25-49 pieces
1649 €

50-99 pieces
1552 €

100+ pieces
1455 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711