




Manually Tunable Band Pass Filter WTBCGV6-2000-2500-40-108-40SSK

Range 2000 to 2500 MHz Bandwidth 40 MHz Slopes 34 MHz Attenuation 40 dB min.

Passband	40 MHz bandwidth tunable from 2000 to 2500 MHz
Insertion Loss	1.5 dB max. at Fo (2 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	DC to Fo - 54 MHz and Fo + 54 to 5200 MHz
Stopband Attenuation	40 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 175 x 30 x 65 mm (connectors may protrude)
Approx. Weight	0.7 kg
Mounting Provision	10 mm flanges on both ends with 3.3 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female
Tuning	Tuning with knobs


Typical Performance

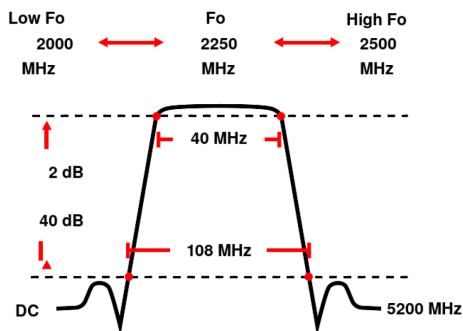

6 Section Cavity Design



Technical drawing

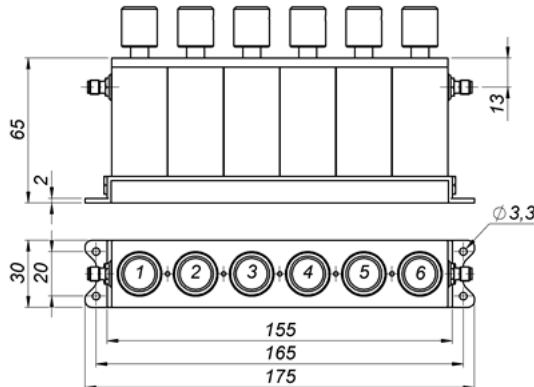

Connector Options:

SMA - Female
SMA - Male
N - Female
N - Male
BNC - Female
BNC - Male

Unit prices

1-4 pieces	5-9 pieces	10-24 pieces	25-49 pieces	50-99 pieces	100+ pieces
2090 €	1986 €	1881 €	1777 €	1672 €	1568 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711