

Manually Tunable Band Pass Filter WTBCGV8-1700-2000-20-60-40SSK

Range 1700 to 2000 MHz Ba

Bandwidth 20 MHz

Slopes 20 MHz

Attenuation 40 dB min.

Passband 20 MHz bandwidth tunable from 1700 to 2000 MHz

Insertion Loss 2.5 dB max. at Fo (3 dB max. at Corners)

Return Loss 14 dB min. (VSWR 1.5:1 max.)

Stopband DC to Fo - 30 MHz and Fo + 30 to 4420 MHz

Stopband Attenuation40 dB min.Operating Temperature15 °C to 45 °C

Power Handling will be quoted on request (See our <u>warranty</u>)

Dimensions (L x W x H) max. 225 x 30 x 65 mm (connectors may protrude)

Approx. Weight 0.9 kg

Mounting Provision 10 mm flanges on both ends with 3.3 mm holes

Connector 1SMA - FemaleConnector 2SMA - FemaleTuningTuning with knobs


Typical Performance

Low Fo Fo High Fo 2000 MHz MHz MHz MHz 3 dB 60 MHz 4420 MHz

8 Section Cavity Design



Technical drawing

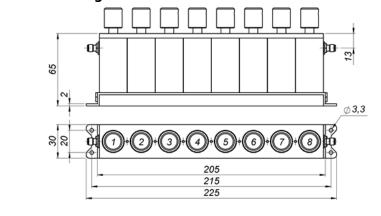

Connector Options:

SMA - Female SMA - Male N - Female N - Male BNC - Female BNC - Male

Unit prices

Instruments. All rights reserved

82015

1-4 pieces

5-9 pieces

10-24 pieces

25-49 pieces 1947 €

50-99 pieces 1832 €

100+ pieces 1718 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.

Graf-Rasso-Street. 1 82346 Andechs Germany Phone: +49 (0) 8152 918230 Telefax: +49 (0) 8152 918255 Email: info@wainwright-filters.com

Legal notes

Managing director: Terence Wainwright Registering court: Amtsgericht München Abt.B Nr. 58192 VAT Id number: DE 128249711