




Manually Tunable Band Pass Filter WTBCT5-700-1000-10-40-40SSK

Range 700 to 1000 MHz Bandwidth 10 MHz Slopes 15 MHz Attenuation 40 dB min.

Passband	10 MHz bandwidth tunable from 700 to 1000 MHz
Insertion Loss	2.5 dB max. at Fo (3 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	DC to Fo - 20 MHz and Fo + 20 to 1820 MHz
Stopband Attenuation	40 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 330 x 60 x 108 mm (connectors may protrude)
Approx. Weight	3.65 kg
Mounting Provision	15 mm flanges on both ends with 5.2 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female
Tuning	Tuning with knobs


Typical Performance

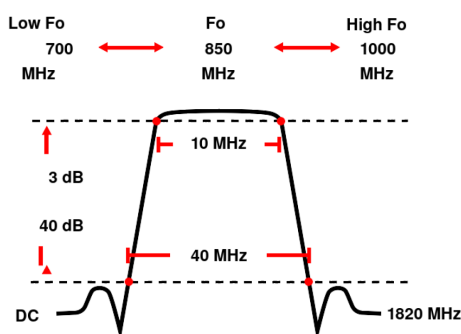

5 Section Cavity Design



Technical drawing

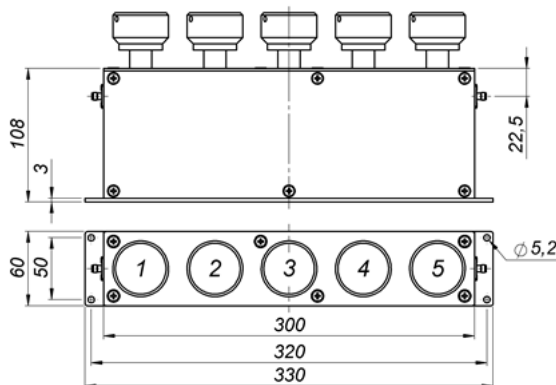

Connector Options:

SMA - Female
SMA - Male
N - Female
N - Male
BNC - Female
BNC - Male
7/16" - Female

Unit prices

1-4 pieces	5-9 pieces	10-24 pieces	25-49 pieces	50-99 pieces	100+ pieces
2590 €	2461 €	2331 €	2202 €	2072 €	1943 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711