




Manually Tunable Band Reject / Notch Filter

WTRCT10-2280-2700-20-50-70SSK

Tuning Range 2280 to 2700 MHz Bandwidth 20 MHz Slopes 15 MHz Attenuation 70 dB min.

Passband	DC to $F_o - 25$ MHz and $F_o + 25$ to 4000 MHz
Insertion Loss	1.15 dB max. (1.25 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	20 MHz bandwidth tunable from 2280 to 2700 MHz
Stopband Attenuation	70 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 330 x 120 x 76 mm (connectors may protrude)
Approx. Weight	5.8 kg
Mounting Provision	15 mm flanges on both ends with 5.2 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female
Tuning	Tuning with knobs


Typical Performance

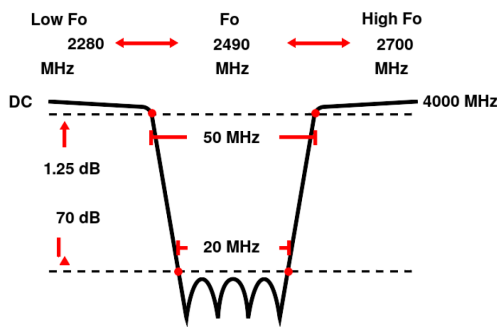

10 Section Cavity Design



Technical drawing

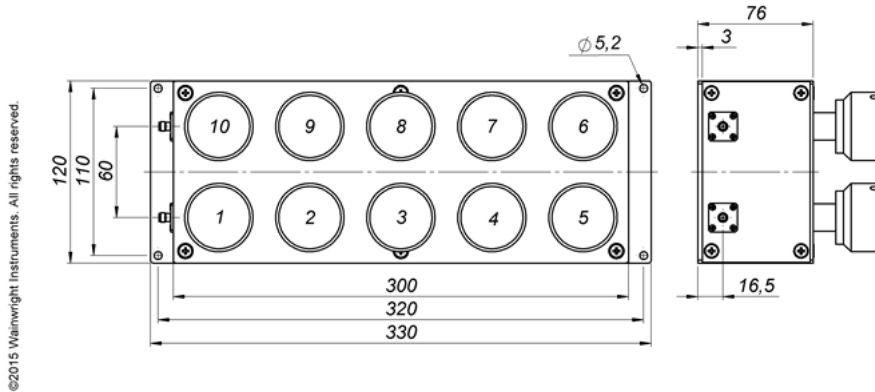

Connector Options:

- SMA - Female
- SMA - Male
- N - Female
- N - Male
- BNC - Female
- BNC - Male

Unit prices	1-4 pieces 2890 €	5-9 pieces 2746 €	10-24 pieces 2601 €	25-49 pieces 2457 €	50-99 pieces 2312 €	100+ pieces 2168 €
--------------------	-----------------------------	-----------------------------	-------------------------------	-------------------------------	-------------------------------	------------------------------

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

Wainwright Instruments GmbH
Graf-Rasso-Street. 1
82346 Andechs
Germany

Contact
Phone: +49 (0) 8152 918230
Telefax: +49 (0) 8152 918255
Email: info@wainwright-filters.com

Legal notes
Managing director: Terence Wainwright
Registering court: Amtsgericht München Abt.B Nr. 58192
VAT Id number: DE 128249711