



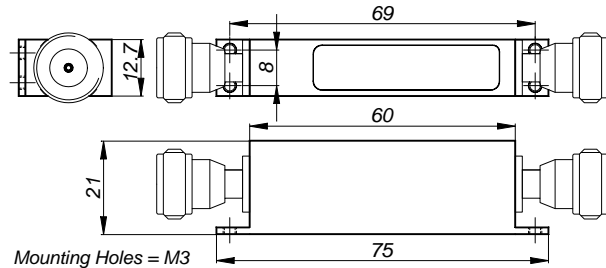

**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

Fco between 500 and 1000 MHz	Highpass Standard* Filters Cauer (Elliptic) Design C11/80**	WHJS Series: 21 mm high
--	--	-----------------------------------

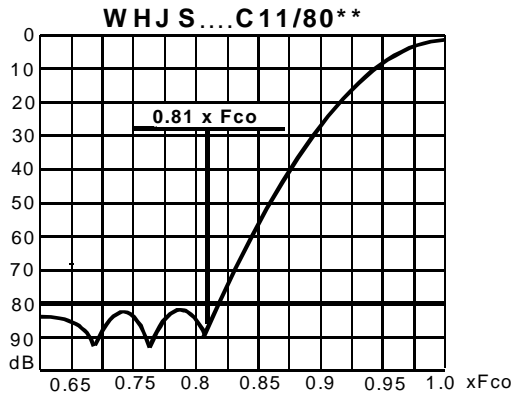

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)

Return Loss (50 Ω) in Passband - at the worst point
Filters up to 224 MHz Fco: 14 dB min. = VSWR 1.5 : 1 max.
Filters 225 to 1000 MHz Fco: 12 dB min. = VSWR 1.67 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation 80 dB min. from DC to 0.81 x Fco =
		at Fco	at 1.03 x Fco	at 1.1 x Fco	
WHJS 500 C11/80**	500 to 3000	1.10 dB	0.90 dB	0.70 dB	DC to 405 MHz
WHJS 550 C11/80**	550 to 3000	1.10 dB	0.90 dB	0.70 dB	DC to 445 MHz
WHJS 600 C11/80**	600 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 486 MHz
WHJS 650 C11/80**	650 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 526 MHz
WHJS 700 C11/80**	700 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 567 MHz
WHJS 750 C11/80**	750 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 607 MHz
WHJS 800 C11/80**	800 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 648 MHz
WHJS 850 C11/80**	850 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 688 MHz
WHJS 900 C11/80**	900 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 729 MHz
WHJS 950 C11/80**	950 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 769 MHz
WHJS 1000 C11/80**	1000 to 4000	1.10 dB	0.90 dB	0.70 dB	DC to 810 MHz

Filters with cut-off frequencies that are not listed above:

Choose any Fco between 500 MHz and 1000 MHz and assign a **Model Number** by inserting the desired Fco.
Example: The Model Number of a 11 degree / 80 dB Cauer Highpass Filter with a cut-off frequency of 525 MHz is **WHJS 525C11/80SS**. For insertion loss and dimensions of the listed **lower** frequency see **WHJS 500C11/80SS**.

PRICES (each)	EURO	US-\$
1 to 4 filters	673	Will be quoted
5 to 9 filters	606	
10 to 24 filters	546	
Test Report with Analyzer Curves:	15	
Cert. of Conformance:	supplied	

Delivery Terms: FCA Andechs-Frieding (free carrier) according to **Incoterms 2000**

Regarding payment terms and Warranty see [Terms and Conditions](#)

In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2000** (unversichert).

Delivery Time: normally 3 to 4 weeks - depending on quantity ordered and on our work load at time of order.

*) **Standard Filters** carry an "S" in the model number (i.e. WHJS 10C11/80SS). Such filters are either in stock or can be built quickly from prepared assemblies. The filters are guaranteed to meet the specifications shown in the data sheets. Certificate of Conformance supplied. Prices for Test Sheets see above