




**Wainwright  
Instruments GmbH**


Widdersberger Str.14  
**82346 Andechs, Germany**  
 Tel.: +49-8152-918230 Fax: +49-8152-918255  
 E-Mail: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)  
 Internet: [www.wainwright-filters.com](http://www.wainwright-filters.com)

<b>8 Resonator</b> Cavity Design <b>WRCGV Series</b>	<b>Band Reject Filter</b> Reject Band 880 to 915 MHz Passbands DC to 870 & 925 to 2500 MHz	<b>Model Number:</b> <b>WRCGV 880/915-870/925-40/8</b> (add connector code - see below)
--	--	---

- Slopes 10 MHz / 40 dB
- Very Flat Passband to 2500 MHz

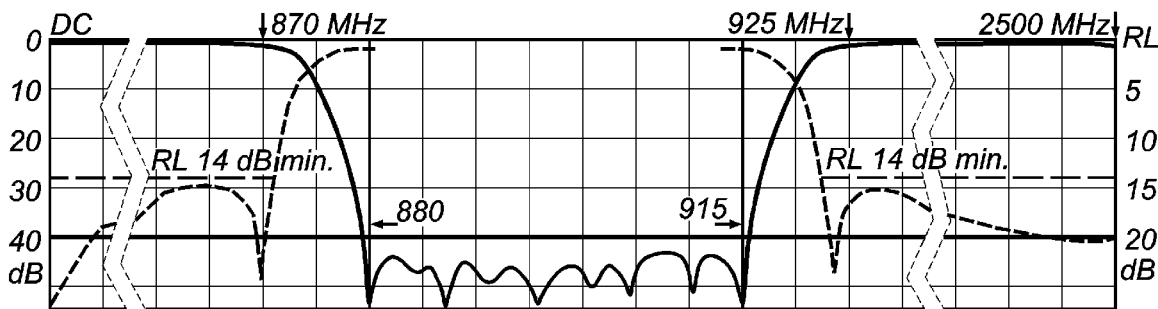

**Model Numbers:** WRCGV 880/915-870/925-40/8SS (= SMA-F) OR WRCGV 880/915-870/925-40/8EE (= N-F)

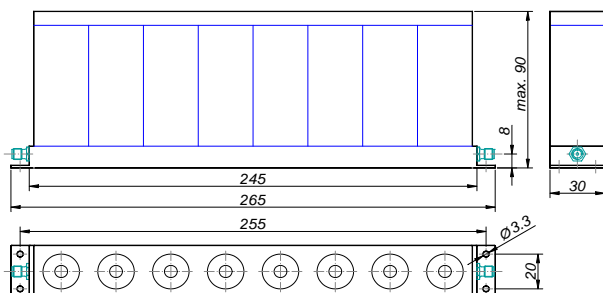

<b>Specifications</b>		
<b>Reject Band:</b>	880 to 915 MHz	
<b>Reject Attenuation:</b>	40 dB min.	
<b>Passbands:</b>	DC to 870 MHz and 925 to 2500 MHz	
<b>Passband Corners:</b>	870 MHz and 925 MHz	
<b>Passband Loss:</b>	1.0 dB max. / 1.5 dB max. at passband corners	
<b>Return Loss (50Ω) in Passband:</b>	14 dB min. = VSWR 1.5 : 1 max.	
<b>Operating Temperature:</b>	+15°C to +40°C	
<b>Dimensions:</b>	90 mm high (max.) x 30 x 245 mm <b>Approx. Weight:</b> 1.2 kg (2.6 lbs) plus flanges & connectors	
<b>Mounting Provision:</b>	10 mm flanges with Ø 3.3 holes	
<b>Connector Code:</b>	SMA-female = <b>SS</b> or N-female = <b>EE</b>	
<b>Prices:</b> when purchasing 1 - 4 pcs.	<b>Euro: € 978,-</b>	<b>US-\$: <u>Will be quoted.</u></b>
<b>Delivery Terms:</b>	FCA Andechs-Frieding (free carrier) according to <i>Incoterms 2000</i> . In Deutschland liefern wir frachtfrei gemäß CPT <i>Incoterms 2000</i> (unversichert). Regarding payment terms and Warranty see <a href="#">Terms and Conditions</a> .	
Test Sheet with Analyzer Curves supplied.		

**Delivery Time:** normally 3 to 4 weeks - depending on work load in the factory at time of order.