



# Manually Tunable Band Reject / Notch Filter


## WTRCT5-890-990-0.2-1.2-40SSK

Tuning Range 890 to 990 MHz    Bandwidth 0.2 MHz    Slopes 0.5 MHz    Attenuation 40 dB min.


|                               |                                                               |
|-------------------------------|---------------------------------------------------------------|
| <b>Passband</b>               | DC to Fo - 0.6 MHz and Fo + 0.6 to 2500 MHz                   |
| <b>Insertion Loss</b>         | 0.5 dB max. (3 dB max. at Corners)                            |
| <b>Return Loss</b>            | 14 dB min. (VSWR 1.5:1 max.)                                  |
| <b>Stopband</b>               | 0.2 MHz bandwidth tunable from 890 to 990 MHz                 |
| <b>Stopband Attenuation</b>   | 40 dB min.                                                    |
| <b>Operating Temperature</b>  | 15 °C to 45 °C                                                |
| <b>Power Handling</b>         | will be quoted on request (See our <a href="#">warranty</a> ) |
| <b>Dimensions (L x W x H)</b> | max. 330 x 60 x 108 mm (connectors may protrude)              |
| <b>Approx. Weight</b>         | 3.9 kg                                                        |
| <b>Mounting Provision</b>     | 15 mm flanges on both ends with 5.2 mm holes                  |
| <b>Connector 1</b>            | SMA - Female                                                  |
| <b>Connector 2</b>            | SMA - Female                                                  |
| <b>Tuning</b>                 | Tuning with knobs                                             |

## Typical Performance

## 5 Section Cavity Design

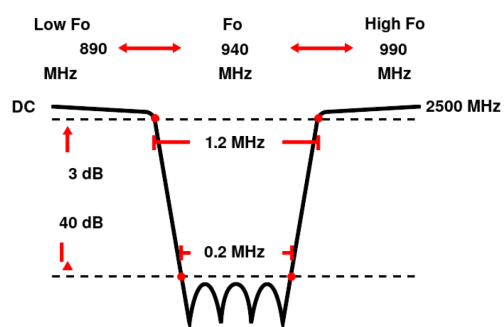

## Technical drawing

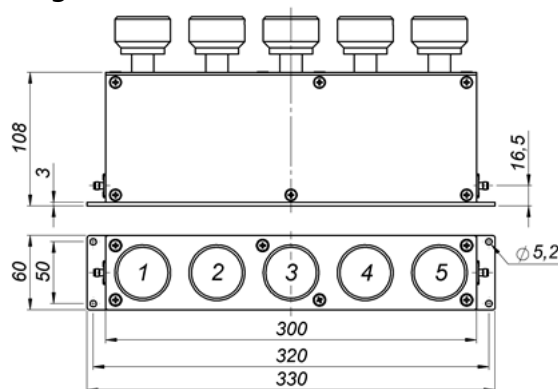

### Connector Options:

SMA - Female  
SMA - Male  
N - Female  
N - Male  
BNC - Female  
BNC - Male

## Unit prices

**1-4 pieces**  
2390 €

**5-9 pieces**  
2271 €

**10-24 pieces**  
2151 €

**25-49 pieces**  
2032 €

**50-99 pieces**  
1912 €

**100+ pieces**  
1793 €

## Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**

**Wainwright Instruments GmbH**  
Graf-Rasso-Street. 1  
82346 Andechs  
Germany

**Contact**  
Phone: +49 (0) 8152 918230  
Telefax: +49 (0) 8152 918255  
Email: [info@wainwright-filters.com](mailto:info@wainwright-filters.com)

**Legal notes**  
Managing director: Terence Wainwright  
Registering court: Amtsgericht München Abt.B Nr. 58192  
VAT Id number: DE 128249711