



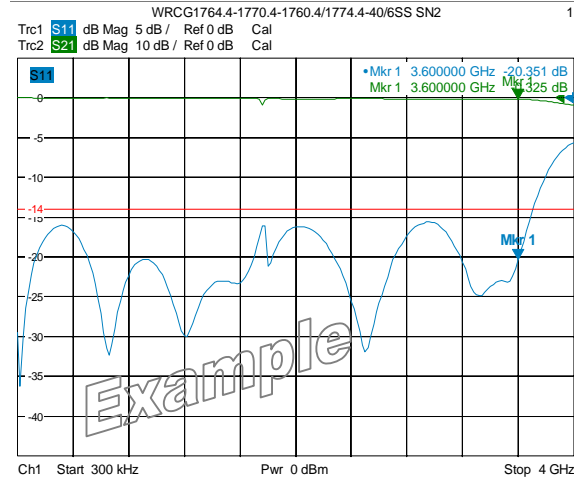


6 Resonator Cavity Design WRCG Series	Band Reject Filter Reject Band 1764.4 to 1770.4 MHz Passbands DC to 1760.4 & 1774.4 to 3600 MHz	Model Number: WRCG 1764.4/1770.4-1760.4/1774.4-40/6 (add connector code - see below)
---	--	--

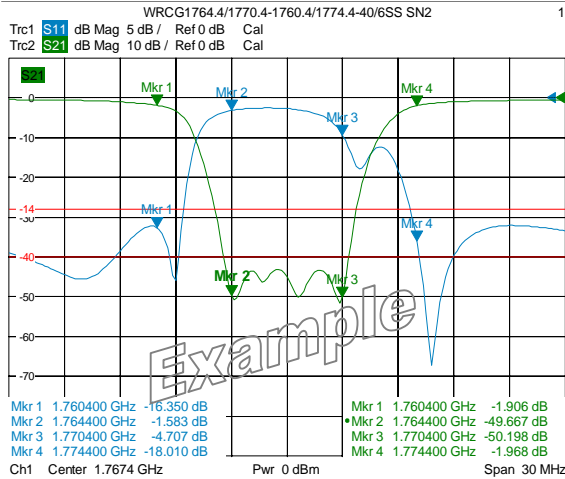


Model Numbers: WRCG 1764.4/1770.4-1760.4/1774.4-40/6SS (= SMA-F)
 WRCG 1764.4/1770.4-1760.4/1774.4-40/6EE (= N-F)

- Very Flat Passband to 3600 MHz
- Slopes: 4 MHz / 40 dB



Dimensions:
 60 mm high x 30 mm wide
 165 mm long – plus connectors

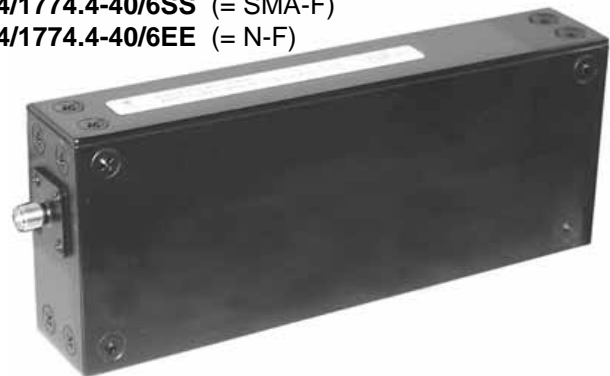

Specifications			
Reject Band:	1764.4 to 1770.4 MHz		
Reject Attenuation:	40 dB min.		
Passbands:	DC to 1760.4 MHz and 1774.4 to 3600 MHz		
Passband Loss:	1.2 dB max. / 2.5 dB max. at passband corners		
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 : 1 max.		
Operating Temperature:	+15°C to +40°C		
Dimensions:	60 mm high x 30 x 165 mm plus connectors		Approx. Weight: 0.50 kg (1.1 lbs)
Mounting Provision:	4 x M4 threaded holes each on all sides - see drawing UMP-1 (Website)		
Connector Code:	SMA-female = SS or N-female = EE		
Price Basis: see Ord. Inf., Terms, Warranty	PRICES:	Euro: Price based on shipment ex factory	US-€: Price includes shipping, import charges and customs duty. *
When purchasing	1 – 4 pcs.	€ 706,--	\$ 1200.--
Test Sheet with Analyzer Curves supplied.			
* Prices in US-€ for shipments to the USA only. American customers are welcome to purchase at EURO-prices and carry postage/freight and import charges directly.			

Delivery Time: normally 4 to 6 weeks - depending on work load in the factory at time of order.