





**Wainwright
Instruments GmbH**

Widdersberger Str.14
82346 Andechs, Germany
 Tel.: +49-8152-918230 Fax: +49-8152-918255
 E-Mail: info@wainwright-filters.com
 Internet: www.wainwright-filters.com

<p>8 Resonator Cavity Design WRCJV Series</p>	<p>Band Reject Filter Reject Band 2645 to 2665 MHz Passbands DC to 2620 & 2690 to 4500 MHz</p>	<p>Model Number: WRCJV 2645/2665- 2620/2690-60/8SS</p>
---	---	---

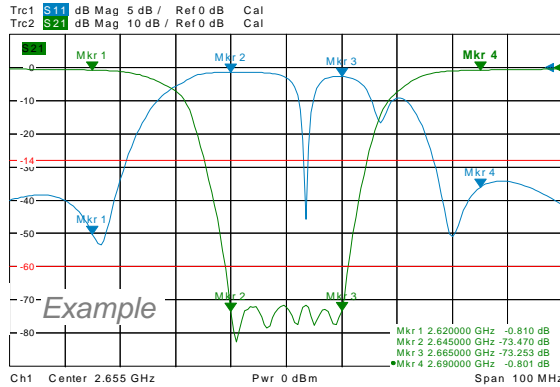



Reject Band Response

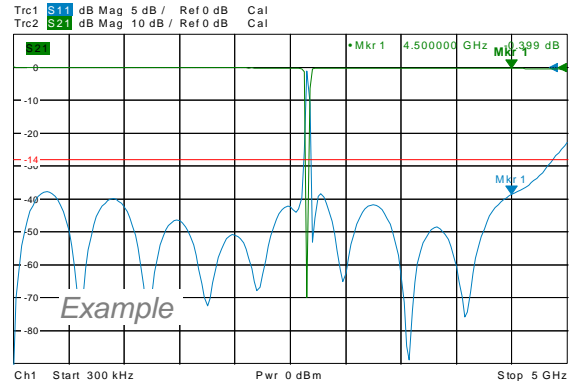

Passband Response

Model Number: WRCJV2645/2665-2620/2690-60/8SS (= SMA-F)

- Very Flat Passband to 4500 MHz
- Slopes: 25 MHz / 60 dB

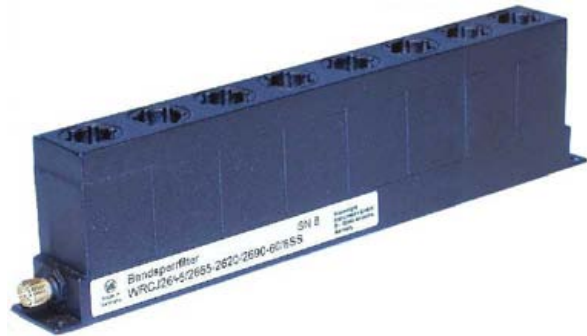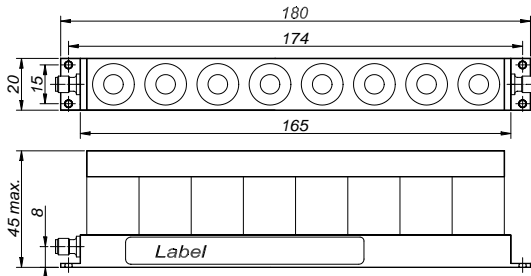

Specifications		
Reject Band:	2645 to 2665 MHz	
Reject Attenuation:	60 dB min.	
Passbands:	DC to 2620 MHz and 2690 to 4500 MHz	
Passband Loss:	1.0 dB max. <u>except:</u> 2.0 dB max. at passband corners	
Return Loss (50Ω) in Passband:	14 dB min. = VSWR 1.5 max.	
Operating Temperature:	+15°C to +40°C	
Dimensions:	Max. 45 mm high x 20 x 165 mm plus flanges and connectors	
Mounting Provision:	7.5 mm flanges on each end with M3 threaded holes	
Approx. Weight:	<u>Approx.</u> Weight: 0.45 kg (0.9 lbs)	
Connector Code:	SMA-female = SS	
Prices: When purchasing 1 - 4 pcs.	Euro: € 872,--	US-\$: <u>Will be quoted.</u>
Delivery Terms:	FCA Andechs-Frieding (free carrier) according to <i>Incoterms 2000</i> . In Deutschland liefern wir frachtfrei gemäß CPT <i>Incoterms 2000</i> (unversichert). Regarding payment terms and Warranty see Terms and Conditions .	
Test Sheet with Analyzer Curves supplied.		

Delivery Time: normally 3 to 4 weeks - depending on work load in the factory at time of order.