




Band Reject / Notch Filter

WRCGV10-902.5-910-930-937.5-40SS


Stopband 910 to 930 MHz Slopes 7.5 MHz Bandwidth 20 MHz Attenuation 40 dB min.

Passband	DC to 902.5 MHz and 937.5 to 2580 MHz
Insertion Loss	1 dB max. (1.5 dB max. at Corners)
Return Loss	14 dB min. (VSWR 1.5:1 max.)
Stopband	920 (Fo) ± 10 MHz = 910 to 930 MHz
Stopband Attenuation	40 dB min.
Operating Temperature	15 °C to 45 °C
Power Handling	will be quoted on request (See our warranty)
Dimensions (L x W x H)	max. 325 x 30 x 105 mm (connectors may protrude)
Approx. Weight	1.65 kg
Mounting Provision	10 mm flanges on both ends with 3.3 mm holes
Connector 1	SMA - Female
Connector 2	SMA - Female


Typical Performance

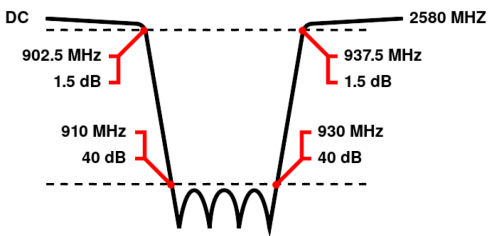

10 Section Cavity Design



Technical drawing

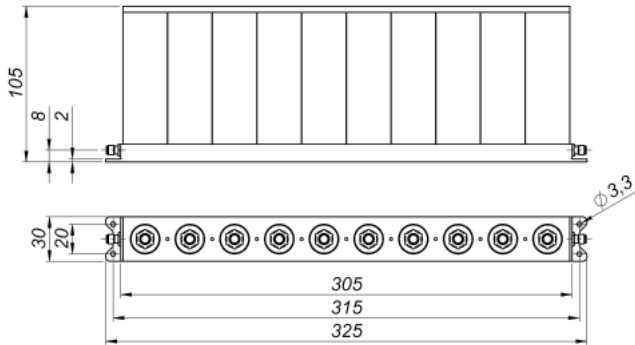

©2013 Wainwright Instruments. All rights reserved.

Connector Options:

- SMA - Female
- N - Female

Unit prices

1-4 pieces	5-9 pieces	10-24 pieces	25-49 pieces	50-99 pieces	100+ pieces
1690 €	1606 €	1521 €	1437 €	1352 €	1268 €

Delivery Terms

FCA Andechs (free carrier) according to Incoterms 2020. Regarding payment terms and warranty see Terms and Conditions. Delivery time: normally 4 to 6 weeks - depending on quantity ordered and on our work load. **Customer is responsible for observing all applicable export laws in regard to filter application and location of end user.**